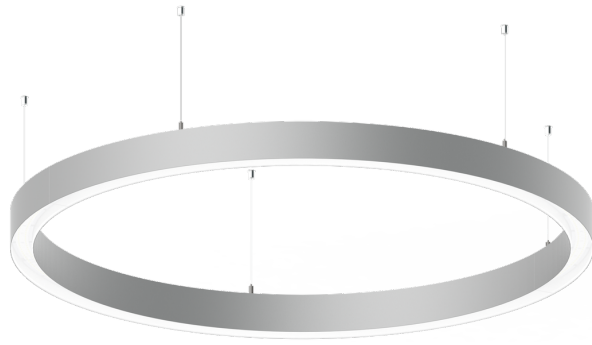


**GAVLE 6** (GAV-90301)**Product description**

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 500 mm

**Luminaire Structure**

- Integral control gear

**Optic**


0 / 0

**Product colour**

01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

**Special finishes upon request**

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

**GAVLE 6 (GAV-90301)**


**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	O	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	288 & 288 LED	<b>Optic value</b>	Opal	<b>MacAdam Ellipse</b>	3 SDCM
<b>Power</b>	74 W	<b>Optic (2nd)</b>	O	<b>Lifetime L90B10 (hours)</b>	> 23,000
<b>Lumen</b>	8276 - 8639 lm	<b>Optic (2nd) value</b>	Opal	<b>Lifetime L80B10 (hours)</b>	> 45,000
<b>Efficacy</b>	112 - 117 lm/W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Lifetime L80B50 (hours)</b>	> 50,000
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Variants (1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Weight</b>	6.1 kg		

**Gavle 500**



**Accessories**



Supply cable surface mounting box  
**A80981**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**