


**GAVLE 6** (GAV-90302)



**Product description**

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 500 mm - Tunable White

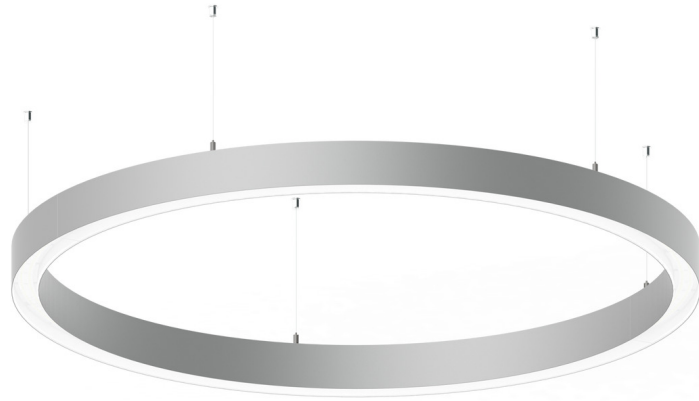

microPrim™

**Luminaire structure**

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA diffuser (UGR <19) for glare control

- Integral control gear
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options

**Optic**



0

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**GAVLE 6** (GAV-90302)


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 576 & 576 LED         |
| <b>Power</b>         | 74 W                  |
| <b>Lumen</b>         | 8639 lm               |
| <b>Efficacy</b>      | 117 lm/W              |
| <b>Driver option</b> | Integral control gear |

|                      |                       |
|----------------------|-----------------------|
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |
| <b>Optic</b>         | 0                     |
| <b>Optic value</b>   | 102°                  |
| <b>CCT / CRI</b>     | TW (2700K - 6500K)    |
| <b>Dimming type</b>  | DALI                  |

|                              |   |
|------------------------------|---|
| <b>Product colours</b>       | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>                | 5.5 kg  |
| <b>Operating temperature</b> | -20 °C to 40 °C   |
| <b>Variants (DALI)</b>       | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)                                   |

**Gavle 500**



**GAVLE 6** (GAV-90302)**Accessory**

Supply cable surface mounting  
box  
**A80981**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**