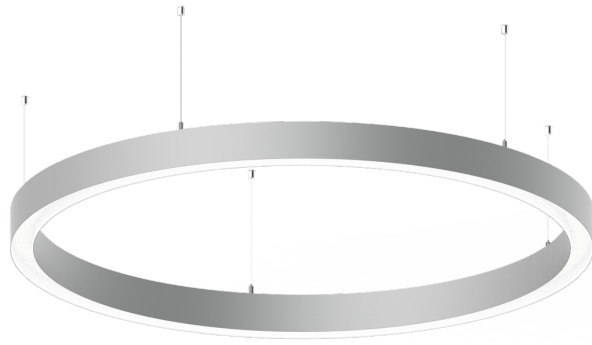


GAVLE 6 (GAV-90304)**Product description**

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 500 mm - RGBW DMX

**Luminaire Structure**

- Remote driver (included)

Optic


0

Product colour

01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

GAVLE 6 (GAV-90304)

Technical information

| | | | | | |
|---------------------|-----------------|----------------------|--------------------------|------------------------------|---|
| Material | Aluminium | Driver option | Remote driver (included) | CCT / CRI | RGBW30, RGBW40 |
| Light source | 1152 & 1152 LED | Driver | Constant current (CC) | Dimming type | DMX, DMX/RDM |
| Power | 82 W | Input voltage | 250 mA, | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten |
| Lumen | 3023 lm | Optic | 0 | | - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Efficacy | 37 lm/W | Optic value | 102° | Weight | 5.5 kg |
| | | | | Operating temperature | -20 °C to 40 °C |

Gavle 500

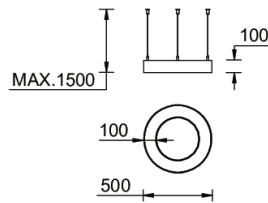

Accessories

