


GAVLE 6 (GAV-90312)



Product description

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 1000 mm - TW

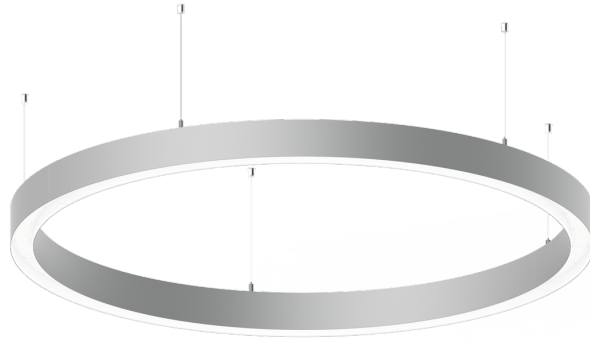

Luminaire Structure

- Integral control gear

Optic



0

Product colour




01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

GAVLE 6 (GAV-90312)


Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1344 & 1344 LED	Input voltage	220-240 V 50/60 Hz	Weight	12.2 kg
Power	172 W	Optic	0	Operating temperature	-20 °C to 40 °C
Lumen	20363 lm	Optic value	102°	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Efficacy	118 lm/W	CCT / CRI	TW (2700K - 6500K)		
Driver option	Integral control gear	Dimming type	DALI		


Gavle 1000

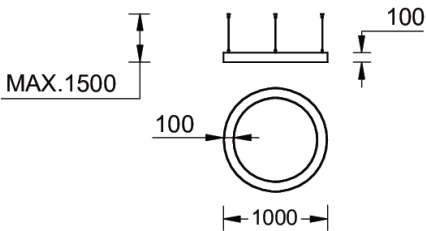

Accessories

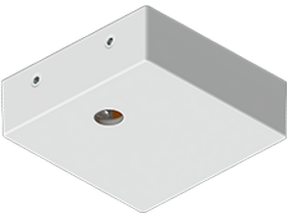

Supply cable surface mounting box
A80981



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591