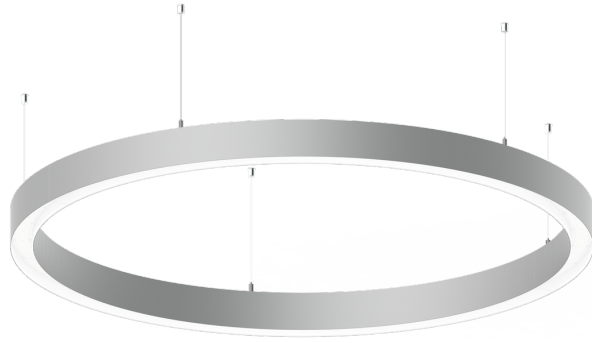


GAVLE 6 (GAV-90314)**Product description**

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 1000 mm - RGBW DMX

**Luminaire Structure**

- Remote driver (included)

Optic


0

Product colour

01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

GAVLE 6 (GAV-90314)

Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	2688 & 2688 LED	Input voltage	500 mA,	Weight	11.7 kg
Power	186 W	Optic	0	Operating temperature	-20 °C to 40 °C
Lumen	7127 lm	Optic value	102°	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Efficacy	38 lm/W	CCT / CRI	RGBW30, RGBW40		
Driver option	Remote driver (included)	Dimming type	DMX, DMX/RDM		

Gavle 1000

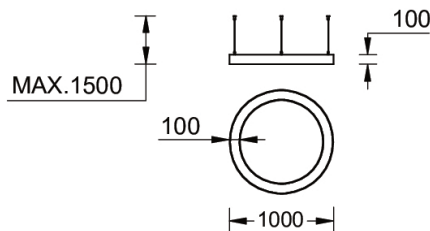

Accessories




Nicolaudie - SLESA-U9
A60491



Nicolaudie - SLESA-U11
A66891



Nicolaudie - STICK-KE1
A60791

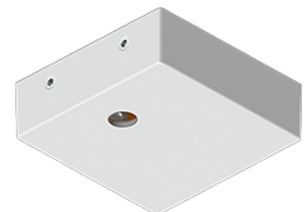

Supply cable surface mounting
box
A80981



Pharos - TPC touch screen &
EXT controller DMX and DALI 1
Universe
A64491



Pharos - POE Connect
A64591



Pharos - TPC touch screen &
LPC controller DMX 2 Universe
A64691



Pharos - RDM DMX Splitter
A64791

GAVLE 6 (GAV-90314)



Pharos - CLOUD
A64991



Nicolaudie - STICK-KE2
A65091



Recessing box
A61051



Pharos - TPS Touch Panel
Station
A65191



Pharos - LPCX Lighting Playback
Controller X
A66991



Pharos - EDN 10
A65391



DMX splitter & amplifier within
an IP65 box
A63991



Nicolaudie - DINA-DR MICRO
DMX lighting controller & Power
adapter
A67291



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM