

GAVLE 6 (GAV-90343)



Product description

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 2500 mm - RGBW



Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Opal PMMA diffuser (UGR <19) for glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI) for GAV-90001, GAV-90011, GAV-90021, GAV-90031, GAV-90041, GAV-90051, GAV-90061, GAV-90071, GAV-90101, GAV-90111, GAV-90121, GAV-90131, GAV-90141, GAV-90151, GAV-90161, GAV-90171

- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options

Optic




0 / 0

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

GAVLE 6 (GAV-90343)


Technical information

Material	Aluminium
Light source	6912 & 6912 LED
Power	480 W
Lumen	19362 lm
Efficacy	40 lm/W
Driver option	Integral control gear


Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	O
Optic value	Opal
Optic (2nd)	O
Optic (2nd) value	Opal

CCT / CRI	RGBW40
Dimming type	Bluetooth
Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	31.8 kg
Operating temperature	-20 °C to 40 °C
Variants (Bluetooth)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GAV-90343

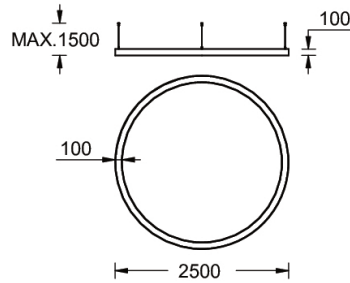

Accessories



Supply cable surface mounting box
A80981



Xpress wireless switch
A90591



Nicolaudie - SLESA-U9
A60491



Nicolaudie - SLESA-U11
A66891

GAVLE 6 (GAV-90343)

Pharos - TPC touch screen &
EXT controller DMX and DALI 1
Universe
A64491



Pharos - POE Connect
A64591



Pharos - TPC touch screen &
LPC controller DMX 2 Universe
A64691



Pharos - RDM DMX Splitter
A64791



Pharos - CLOUD
A64991



Nicolaudie - STICK-KE2
A65091



Recessing box
A61051



Pharos - TPS Touch Panel
Station
A65191



Pharos - LPCX Lighting Playback
Controller X
A66991



Pharos - EDN 10
A65391



DMX splitter & amplifier within
an IP65 box
A63991



Nicolaudie - DINA-DR MICRO
DMX lighting controller & Power
adapter
A67291