


**GAVLE 6** (GAV-90353)



**Product description**

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 3000 mm - RGBW

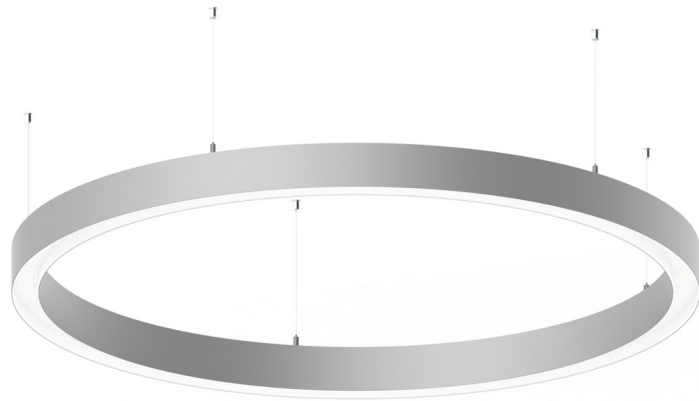

microPrim™

**Luminaire Structure**

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA diffuser (UGR <19) for glare control

- Integral control gear
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options

**Optic**



0 / 0

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**GAVLE 6** (GAV-90353)


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	7680 & 7680 LED
<b>Power</b>	534 W
<b>Lumen</b>	21001 lm
<b>Efficacy</b>	39 lm/W
<b>Driver option</b>	Integral control gear

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	O
<b>Optic value</b>	Opal
<b>Optic (2nd)</b>	O
<b>Optic (2nd) value</b>	Opal

<b>CCT / CRI</b>	RGBW40
<b>Dimming type</b>	Bluetooth
<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	38.2 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Variants (Bluetooth)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GAV-90353

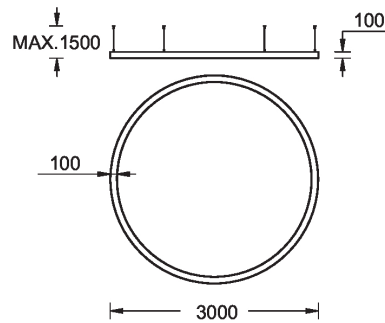

**GAVLE 6 (GAV-90353)**

**Accessory**



Supply cable surface mounting box  
**A80981**



Xpress wireless switch  
**A90591**




SLESA-U9, DMX Controller 256 CH  
**A60491**



SLESA-U11, DMX Controller 1024 CH  
**A66891**



TPC (Touch Panel Controller) & EXT (Extension) 1 Universe  
**A64491**



PoE Connect  
**A64591**



TPC Touch Screen & LPC Controller DMX 2 Universe  
**A64691**



DMX/RDM Splitter - 1 channel input, 4 channels output  
**A64791**



Cloud Remote Management  
**A64991**



STICK-KE2, DMX Controller 1024 CH  
**A65091**



TPS Touch Panel Station  
**A65191**



LPCX (Lighting Playback Controller X)  
**A66991**



EDN 10 (Ethernet Data Node 10 Universes)  
**A65391**



DMX splitter & amplifier within an IP65 box  
**A63991**



DINA-DR MICRO, DMX Lighting Controller & Power Adapter, 60 CH  
**A67291**