

GINO 5 (GI-10001)**Product description**

102x203 mm - 1000 mm

**Luminaire Structure**

- Aluminum housing and extruded aluminium column with high corrosion resistance.
- Stainless steel fasteners in grade 316.

- Durable silicone rubber gasket.
- Clear toughened glass.

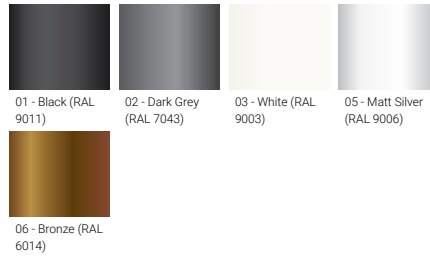
- Powder coating with high corrosion resistance and chemical chromatised protection.

Optic

T2

T3

T4

Product colour

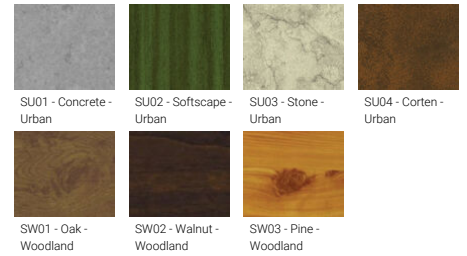
01 - Black (RAL 9011)

02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland

SW03 - Pine - Woodland

GINO 5 (GI-10001)

Technical information

Material	Aluminium
Light source	4 LED
Power	6 W
Lumen	283 - 318 lm
Efficacy	47 - 53 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	T2, T3, T4
Optic value	130°x41°, 108°x54°, 88°x61°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	5.0 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Accessories



Anchor bolt
A10791