

GINO 5 (GI-10002)



Product description

102x203 mm - 1000 mm



Luminaire Structure

- Aluminum housing and extruded aluminium column with high corrosion resistance.
- Stainless steel fasteners in grade 316.

- Durable silicone rubber gasket.
- Clear toughened glass.


- Powder coating with high corrosion resistance and chemical chromatised protection.

Optic




G

Product colour

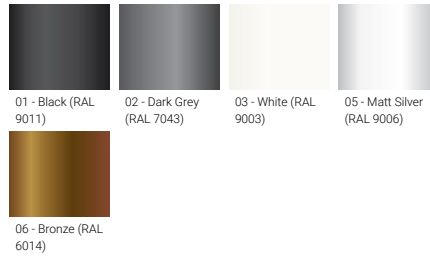

- 01 - Black (RAL 9011)
- 02 - Dark Grey (RAL 7043)
- 03 - White (RAL 9003)
- 05 - Matt Silver (RAL 9006)
- 06 - Bronze (RAL 6014)

Special finishes upon request

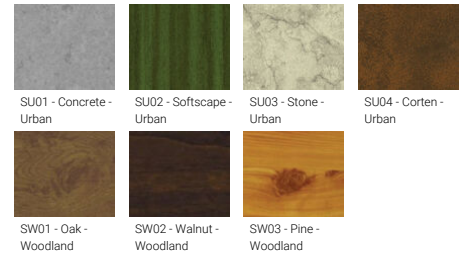

- SU01 - Concrete - Urban
- SU02 - Softscape - Urban
- SU03 - Stone - Urban
- SU04 - Corten - Urban
- SW01 - Oak - Woodland
- SW02 - Walnut - Woodland
- SW03 - Pine - Woodland

GINO 5 (GI-10002)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Operating temperature	-20 °C to 40 °C
Light source	1 COB	Optic	G	Lens / Reflector / Optic	Clear toughened glass
Power	4 W	Optic value	91°	MacAdam Ellipse	3 SDCM
Lumen	219 - 236 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 50,000
Efficacy	55 - 59 lm/W	Dimming type	On/Off	Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver option	Integral control gear	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Driver	Constant current (CC)		Weight	5.0 kg	

Accessories



Anchor bolt
A10791