

GINO 5 (GI-10002)



Product description

102x203 mm - 1000 mm



microPrim™

Luminaire structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Optic




G

Product colour

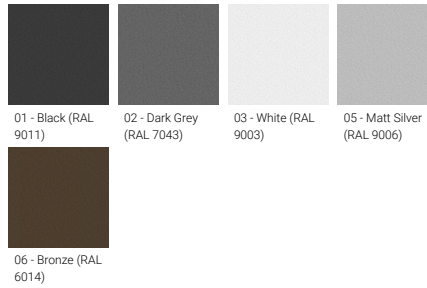

Special finishes upon request

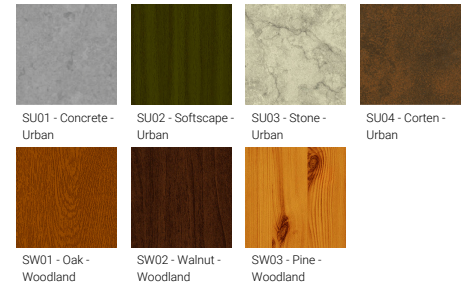

GINO 5 (GI-10002)
Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	97
Light source	1 COB	Optic	G	Dimming type	On/Off
Power	4 W	Optic value	91°	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	210 lm	CCT / CRI	2700K CRI80		
Efficacy	53 lm/W	Bug	B0-U0-G0	Weight	5.0 kg
Driver option	Integral control gear	ULR	<1%	Operating temperature	-20 °C to 40 °C
Driver	Constant current (CC)	ULOR	<1%	Lens / Reflector / Optic	Clear toughened glass
				Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Accessory



Anchor bolt
A10791
