

GINO 5 (GI-10003)



Product description

102x304 mm - 1000 mm



Luminaire Structure

- Aluminum housing and extruded aluminium column with high corrosion resistance.
- Stainless steel fasteners in grade 316.


- Durable silicone rubber gasket.
- Clear toughened glass.

- Powder coating with high corrosion resistance and chemical chromatised protection.


Optic



Product colour

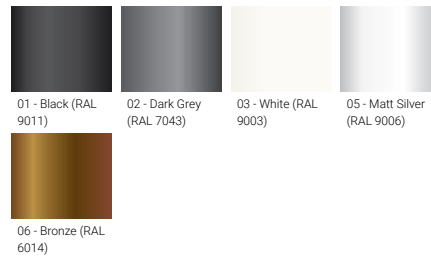

Special finishes upon request

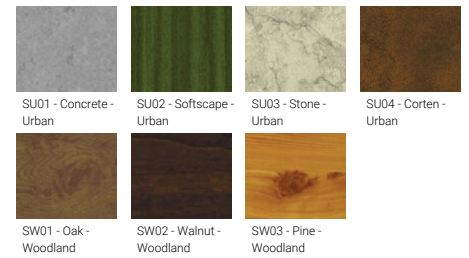

GINO 5 (GI-10003)

Technical information

Material	Aluminium
Light source	2 x 4 LED
Power	12 W
Lumen	566 - 636 lm
Efficacy	47 - 53 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	T2, T3, T4
Optic value	130°x41°, 108°x54°, 88°x61°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	5.9 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Accessories



Anchor bolt
A10791