

**GINO 6 (GI-10005)****Product description**

210x190 mm - 1000 mm

**Luminaire Structure**

- Aluminum housing and extruded aluminium column with high corrosion resistance.
- Stainless steel fasteners in grade 316.

- Durable silicone rubber gasket.
- Clear toughened glass.

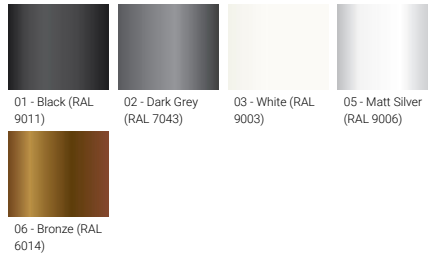
- Powder coating with high corrosion resistance and chemical chromatised protection.

**Optic**

T2

T3

T4

**Product colour**

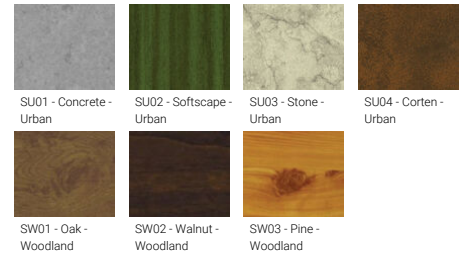
01 - Black (RAL 9011)

02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

**Special finishes upon request**

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland

SW03 - Pine - Woodland

**GINO 6 (GI-10005)**

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	2 x 4 LED	<b>Optic</b>	T2, T3, T4	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Power</b>	10 W	<b>Optic value</b>	141°x49°, 139°x66°, 98°x76°	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	734 - 829 lm	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Lifetime L90B10 (hours)</b>	> 50,000
<b>Efficacy</b>	73 - 83 lm/W	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Driver option</b>	Integral control gear		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
<b>Driver</b>	Constant current (CC)	<b>Product colours</b>			
		<b>Weight</b>	8.3 kg		

**Accessories**



Anchor bolt  
**A11191**