

**GINO 1 (GI-31581)**



**Product description**

Frosted diffuser - Down (Optic) & Up (Optic 2nd)




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Frosted toughened glass


- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

**Optic**




G / G

**Product colour**



**Special finishes upon request**

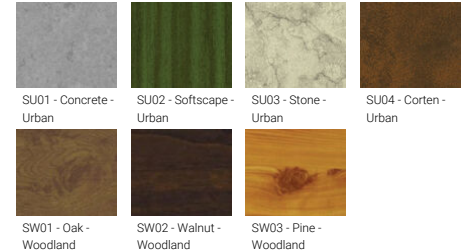

**GINO 1 (GI-31581)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	1 & 1 COB
<b>Power</b>	8 W
<b>Lumen</b>	438 - 472 lm
<b>Efficacy</b>	55 - 59 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	G

<b>Optic value</b>	91°
<b>Optic (2nd)</b>	G
<b>Optic (2nd) value</b>	60°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U3-G0
<b>ULR</b>	50%
<b>ULOR</b>	50%
<b>CIE flux code n°3</b>	97
<b>Dimming type</b>	On/Off

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	1.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Frosted toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 50,000
<b>Variants (On/Off)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

**GI-31581**

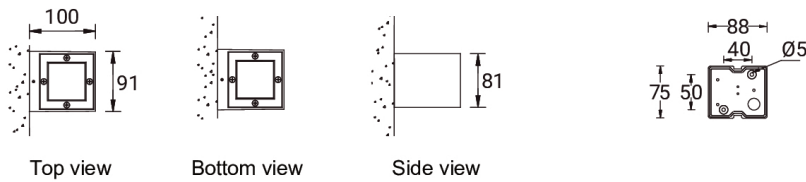

**Accessories**



Surface mounting box for easy cabling (GINO 1)  
**SCE-GINO-1**