

GINO 3 (GI-31601)



Product description


Frosted diffuser - Down (Optic) & Up (Optic 2nd)



Luminaire Structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Frosted toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G / G

Product colour

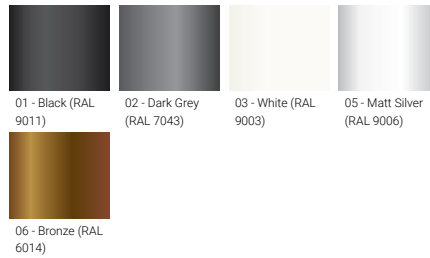

Special finishes upon request

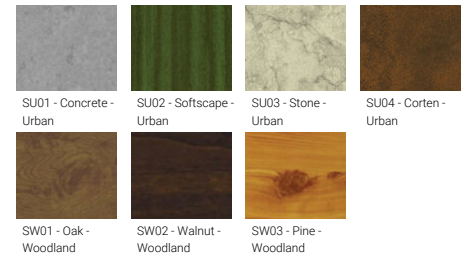

GINO 3 (GI-31601)


Technical information

Material	Aluminium
Light source	2 & 2 COB
Power	16 W
Lumen	1044 - 1128 lm
Efficacy	65 - 71 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	94°
Optic (2nd)	G
Optic (2nd) value	94°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U4-G0
ULR	50%
ULOR	50%
CIE flux code n°3	98
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.0 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Frosted toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GI-31601

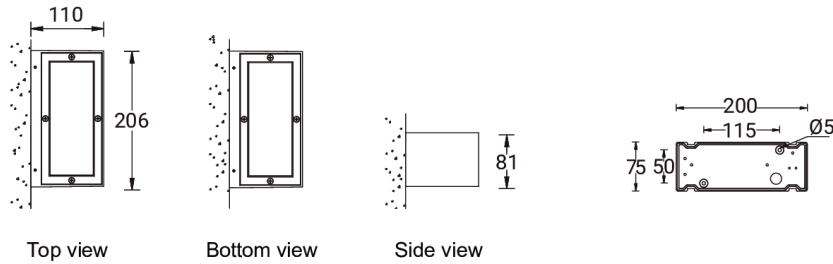

Accessories



Surface mounting box for easy cabling (GINO 3-COB)
SCE-GINO-3-COB



DALI Control System
Control-DALI