

GINO 2 (GI-31621)



Product description


Clear diffuser - Down




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

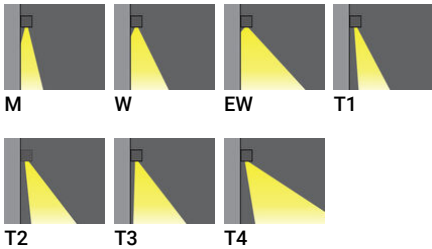

Product colour

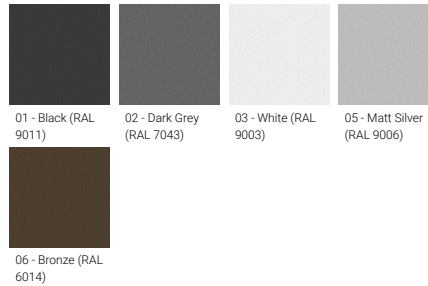

Special finishes upon request

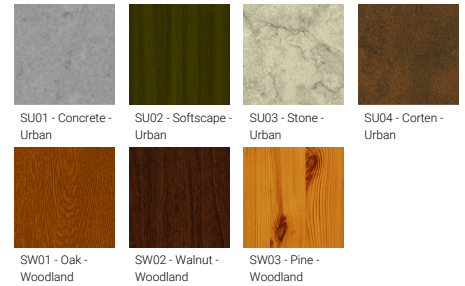

GINO 2 (GI-31621)


Technical information

Material	Aluminium
Light source	4 LED
Power	5 W
Lumen	306 - 473 lm
Efficacy	61 - 95 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T1, T2, T3, T4

Optic value	30°, 56°, 88°x107°, 143°x61°, 129°x44°, 126°x83°, 93°x64°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U0-G0, B1-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100, 98, 99
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.9 kg

Operating temperature	-20 °C to 50 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear glass diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GI-31621

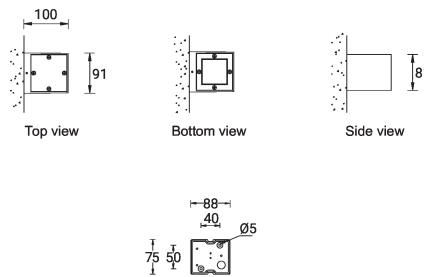

GINO 2 (GI-31621)**Accessory**



Surface mounting box for easy
cabling (GINO 2)
SCE-GINO-2
