

GINO 2 (GI-31621)



Product description

Clear diffuser - Down




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

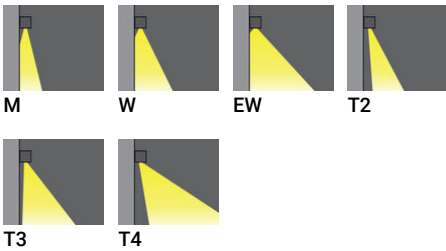

Product colour

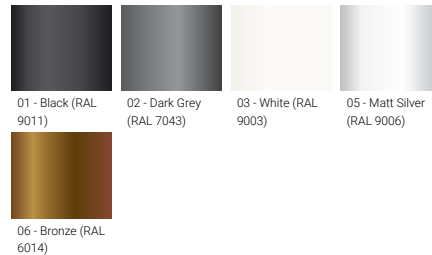

Special finishes upon request

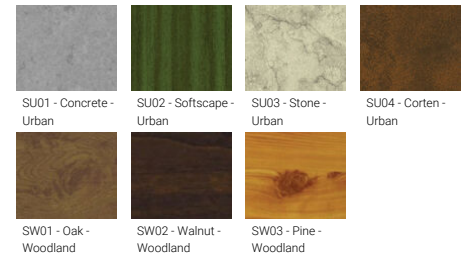


GINO 2 (GI-31621)

Technical information

Material	Aluminium	Optic	M, W, EW, T1, T2, T3, T4	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	4 LED	Optic value	30°, 56°, 88°x107°, 143°x61°, 129°x44°, 126°x83°, 93°x64°	Weight	0.85 kg
Power	5 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 50 °C
Lumen	323 - 473 lm	Bug	B0 U0 G0, B0-U0-G0, B1-U0-G0	Through wiring	Single cable entry
Efficacy	65 - 95 lm/W	ULR	0%	Lens / Reflector / Optic	Clear toughened glass
Driver option	Integral control gear	ULOR	0%	Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	CIE flux code n°3	100, 98, 99		
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off		

GI-31621

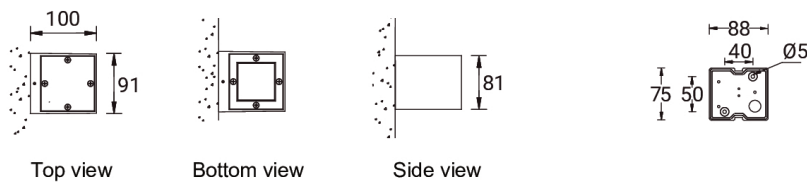

Accessories



Surface mounting box for easy cabling (GINO 2)

SCE-GINO-2