

GINO 1 (GI-31631)



Product description

Clear diffuser - Down (Optic) & Up (Optic 2nd)



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



T4 / T4

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)


Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

GINO 1 (GI-31631)


Technical information

Material	Aluminium
Light source	4 & 4 LED
Power	10 W
Lumen	646 - 946 lm
Efficacy	65 - 95 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	M, W, EW, T1, T2, T3, T4
Optic value	30°, 56°, 88°x107°, 143°x61°, 129°x44°, 126°x83°, 93°x64°
Optic (2nd)	M, W, EW, T1, T2, T3, T4
Optic (2nd) value	30°, 56°, 88°x107°, 143°x61°, 129°x44°, 126°x83°, 93°x64°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U3-G0, B1-U3-G0
ULR	41%, 42%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 57%, 58%
ULOR	41%, 42%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 57%, 58%

CIE flux code n°3	100, 98, 99
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.87 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO)

GI-31631

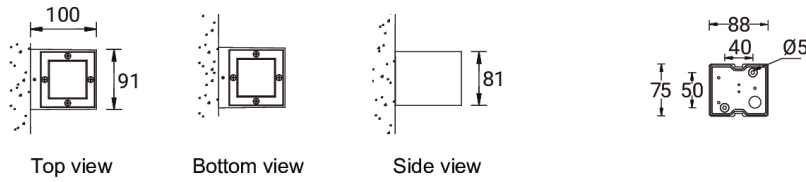

Accessories



Surface mounting box for easy cabling (GINO 1)
SCE-GINO-1