

GINO 3 (GI-31651)



Product description

Clear diffuser - Down (Optic) & Up (Optic 2nd)



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



T4 / EW

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

GINO 3 (GI-31651)


Technical information

Material	Aluminium
Light source	8 & 8 LED
Power	19 W
Lumen	2040 - 2418 lm
Efficacy	106 - 126 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T1, T2, T3, T4
Optic value	30°, 56°, 90°x114°, 148°x70°, 136°x52°, 135°x89°, 104°x67°

Optic (2nd)	M, W, EW, T1, T2, T3, T4
Optic (2nd) value	30°, 56°, 90°x114°, 148°x70°, 136°x52°, 135°x89°, 104°x67°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U5-G0, B1-U4-G0, B1-U5-G0, B1-U5-G1
ULR	0%, 47%, 48%, 49%, 50%, 51%, 52%, 53%
ULOR	0%, 47%, 48%, 49%, 50%, 51%, 52%, 53%
CIE flux code n°3	100, 96, 97, 98, 99
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.97 kg

Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GI-31651

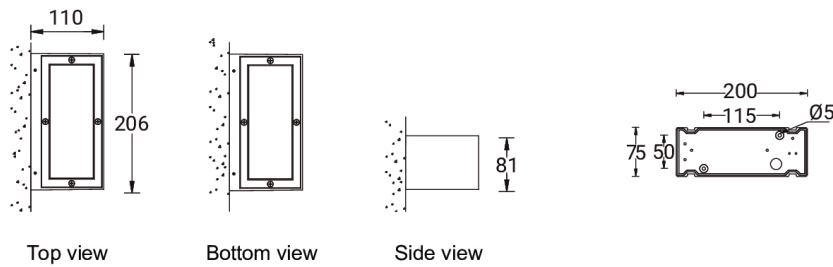

Accessories



Surface mounting box for easy cabling (GINO 3-COB)
SCE-GINO-3-COB



DALI Control System
Control-DALI