

**HARRIER 1 (HA-60037-A)**



**Product description**

Integral control gear - With recessing box - Round - Aluminium frame



**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in grade 316 stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg


**Optic**



**Product colour**

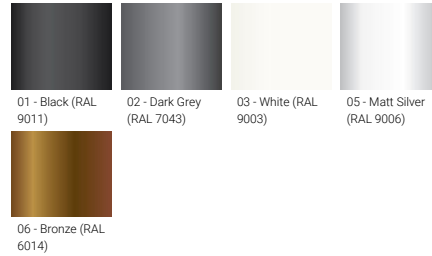

**Special finishes upon request**

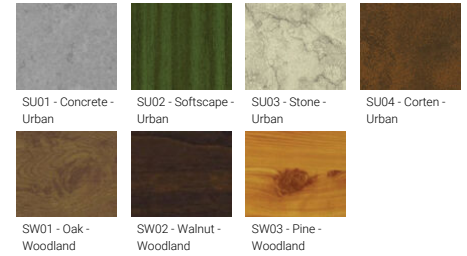

**HARRIER 1 (HA-60037-A)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	MR16-GU10
<b>Power</b>	7.5 W
<b>Lumen</b>	260 - 402 lm
<b>Efficacy</b>	35 - 54 lm/W
<b>Driver option</b>	Integral control gear

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	N, M, VW, E
<b>Optic value</b>	13°, 22°, 58°, 12°x50°
<b>CCT / CRI</b>	3000K CRI95, 4000K CRI95
<b>Dimming type</b>	On/Off

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	0.5 kg
<b>Operating temperature</b>	-20 °C to 50 °C
<b>Cable</b>	One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry, through wiring upon request
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens

**HA-60037-A**

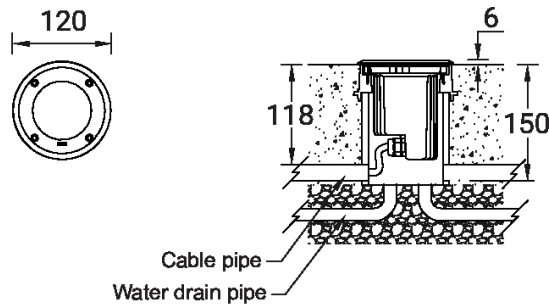

**Accessories**



Connector IP68 3 Pin Power  
**A62591**



Connector IP68 5 Pin Power +  
Signal  
**A613191**