

HARRIER 2 (HA-60197-S)**Product description**

Integral control gear - With recessing box - Square - Stainless steel frame

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in grade 316 stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg


Optic**Product colour**

HARRIER 2 (HA-60197-S)

Technical information

Material	Stainless Steel	Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off
Light source	MR16-GU10	Optic	N, M, VW, E	Product colours	Stainless Steel
Power	7.5 W	Optic value	13°, 22°, 58°, 12°x50°	Weight	0.7 kg
Lumen	260 - 402 lm	CCT / CRI	3000K CRI95, 4000K CRI95	Operating temperature	-20 °C to 50 °C
Efficacy	35 - 54 lm/W	Bug	B0-U3-G0	Cable	One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
Driver option	Integral control gear	ULR	100%	Through wiring	Single cable entry, through wiring upon request
Driver	Constant current (CC)	ULOR	100%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens

HA-60197-S

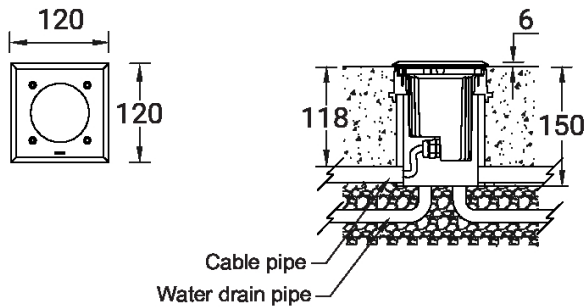

Accessories



Connector IP68 3 Pin Power
A62591



Connector IP68 5 Pin Power +
Signal
A613191