


HARRIER 3 (HA-60295-A)



Product description

Integral control gear - With recessing box - Round - Aluminium frame




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in grade 316 stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Frosted toughened glass
- High-efficiency PMMA lens

- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg


Optic



C

F

Product colour

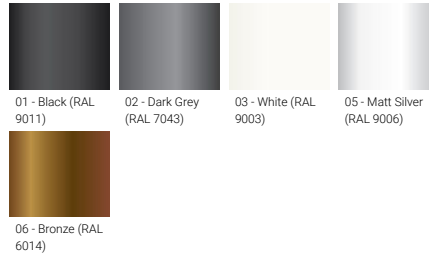

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

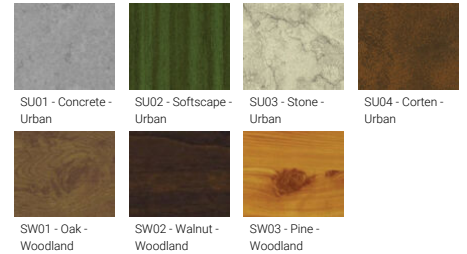

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland


SW03 - Pine - Woodland

HARRIER 3 (HA-60295-A)

Technical information

Material	Aluminium	Optic value	95°, 84°	Cable	One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable	
Light source	12 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry, through wiring upon request	
Power	6 W	Bug	B0-U3-G0	Lens / Reflector / Optic	Clear toughened glass, Frosted toughened glass, High-efficiency PMMA lens	
Lumen	369 - 410 lm	ULOR	100%	MacAdam Ellipse	3 SDCM	
Efficacy	62 - 68 lm/W	CIE flux code n°3	0%	Lifetime L90B10 (hours)	> 23,000	
Driver option	Integral control gear	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 45,000	
Driver	Constant current (CC)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 50,000	
Input voltage	220-240 V 50/60 Hz			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO)	
Optic	C, F					
		Weight	2.1 kg			
		Operating temperature	-20 °C to 50 °C			

HA-60295-A

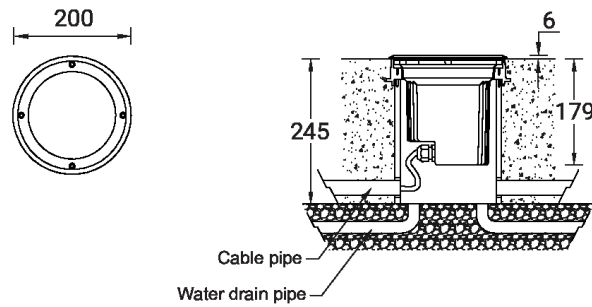

Accessories



Connector IP68 3 Pin Power
A62591



Anti slip glass
A60212



DALI Control System
Control-DALI



Connector IP68 5 Pin Power + Signal
A613191