

HARRIER 1 (HA-60386-S)



Product description

With remote box IP-rated / remote driver / recessing box - Round - Stainless steel frame



Luminaire Structure

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> - Die-cast aluminium housing - Pre-treated before powder coating ensuring high corrosion resistance - 6 mm thick front ring in grade 316 stainless steel or aluminium - Single cable entry, through wiring upon request | <ul style="list-style-type: none"> - Stainless steel fasteners in grade 304 with zinc flake coating (ZFC) - Durable silicone rubber gasket - Clear toughened glass - High-efficiency PMMA lens | <ul style="list-style-type: none"> - Remote driver (included) - Recessing box in high-density polyethylene is included - Suitable for walk-over with a maximum load of 200 kg |
|--|--|--|

Optic



VN

Product colour




00 - Stainless Steel

HARRIER 1 (HA-60386-S)

Technical information

Material	Stainless Steel	Optic value	8°	Through wiring	Single cable entry, through wiring upon request
Light source	1 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Power	8 W	Bug	B0-U3-G0, B0-U4-G0	MacAdam Ellipse	3 SDCM
Lumen	548 - 555 lm	ULR	100%	Lifetime L90B10 (hours)	> 109,000
Efficacy	69 lm/W	ULOR	100%	Lifetime L80B10 (hours)	> 109,000
Driver option	Remote driver (included)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 109,000
Driver	Constant current (CC)	Product colours	Stainless Steel	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	500 mA, 12 VDC	Weight	0.7 kg		
Optic	VN	Operating temperature	-20 °C to 50 °C		

HA-60386-S

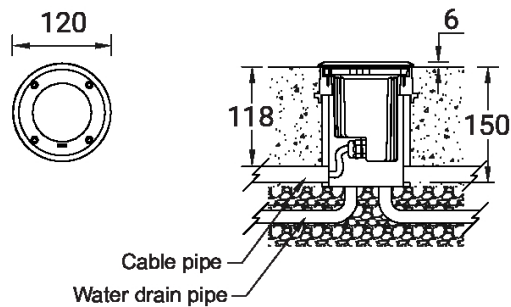

Accessories



Connector IP68 3 Pin Power
A62591



DALI Control System
Control-DALI



Connector IP68 5 Pin Power +
Signal
A613191