

**LINE 1** (ITRB04XXXX1520)



**Product description**

4 W/m - Maximum run per feed 15 m



**Luminaire Structure**

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included

| Variant code   | Lumen    | Efficacy | CCT / CRI   |
|----------------|----------|----------|-------------|
| ITRB0430001520 | 449 lm/m | 96 lm/W  | 3000K CRI90 |
| ITRB0440001520 | 460 lm/m | 98 lm/W  | 4000K CRI90 |
| ITRB0450001520 | 465 lm/m | 99 lm/W  | 5000K CRI90 |

**LINE 1 (ITRB04XXXX1520)**


**Technical information**

|                              |                              |
|------------------------------|------------------------------|
| <b>Power</b>                 | 4.7 W/m                      |
| <b>Driver option</b>         | Remote driver (not included) |
| <b>Driver</b>                | Constant voltage (CV)        |
| <b>Input voltage</b>         | 24V DC                       |
| <b>Input current</b>         | 196 mA/m                     |
| <b>Operating temperature</b> | -20°C ~ +60°C                |

|                                   |          |
|-----------------------------------|----------|
| <b>MacAdam Ellipse</b>            | 3 SDCM   |
| <b>Optic</b>                      | 120°     |
| <b>Lifetime L80B10 (hours)</b>    | > 50,000 |
| <b>Maximum run per power feed</b> | 15 m     |
| <b>LED pitch</b>                  | 8.3 mm   |
| <b>Cutting length</b>             | 50 mm    |

|                   |   |
|-------------------|---|
| <b>Control</b>    | Constant voltage dimmer (1 Channel)                                   |
| <b>Dimensions</b> | Width: 10 mm  |
| <b>Warranty</b>   | 5 years   |
| <b>Notes</b>      | Colour variance +/- 200K. Electrical & optical data variance +/- 10%. |

**ITRB04XXXX1520**

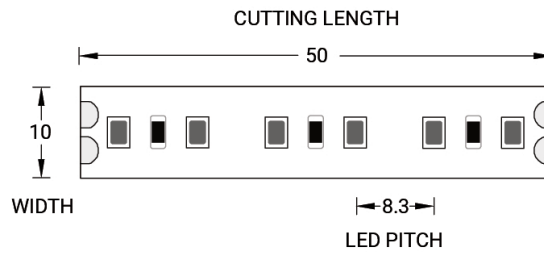

**Accessories**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**