

LINE 6 (ITRB04XXXX1566)

IP66

Product description

4 W/m - Maximum run per feed 15 m - IP66



Luminaire Structure

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included


Variant code	Lumen	Efficacy	CCT / CRI
ITRB0430001566	458 lm/m	97 lm/W	3000K CRI90
ITRB0442501566	457 lm/m	97 lm/W	4250K CRI90
ITRB0462501066	459 lm/m	98 lm/W	6250K CRI90

LINE 6 (ITRB04XXXX1566)

Technical information

Driver option	Remote driver (not included)	Optic	120°	Control	Constant voltage dimmer (1 Channel)
Driver	Constant voltage (CV)	Lifetime L80B10 (hours)	> 50,000		

ITRB04XXXX1566

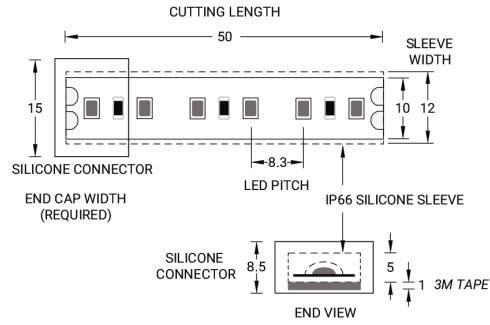

Accessories



Connector silicone - Power feed connector
A80112



Connector silicone - End cap
A80113



Driver (CV) - PWM - 100 W - IP65 - 24 V
A33191-PW



Driver (CV) - PWM - 150 W - IP65 - 24 V
A33291-PW



Driver (CV) - PWM - 250 W - IP65 - 24 V
A33391-PW



Driver (CV) - PWM - 320 W - IP65 - 24 V
A33491-PW



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND

LINE 6 (ITRB04XXXX1566)

Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND
