

**LINE 12** (ITRB12TUW01065)



**Product description**

12 W/m - Maximum run per feed 10 m - TW



**Luminaire Structure**

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included


Variant code	Lumen	Efficacy	CCT / CRI
ITRB12TUW01065	864 lm/m	72 lm/W	TW

**LINE 12** (ITRB12TUW01065)

**Technical information**

<b>Power</b>	12 W/m	<b>MacAdam Ellipse</b>	3 SDCM	<b>Control</b>	Constant voltage dimmer (2 Channel)
<b>Driver option</b>	Remote driver (not included)	<b>Optic</b>	120°	<b>Dimensions</b>	Width: 12.5 mm
<b>Driver</b>	Constant voltage (CV)	<b>Lifetime L80B10 (hours)</b>	> 50,000	<b>Warranty</b>	5 years
<b>Input voltage</b>	24V DC	<b>Maximum run per power feed</b>	10 m	<b>Notes</b>	Colour variance +/- 200K. Electrical & optical data variance +/- 10%.
<b>Input current</b>	625 mA/m	<b>LED pitch</b>	11.9 mm		
<b>Operating temperature</b>	-20°C ~ +60°C	<b>Cutting length</b>	71.43 mm		

**ITRB12TUW01065**

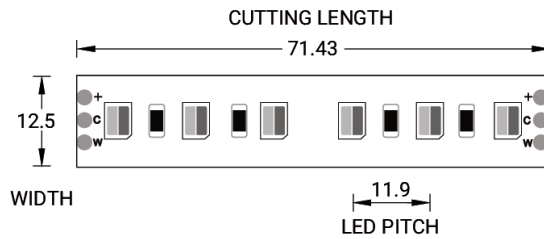

**Accessories**



Driver (CV) - PWM - 100 W - IP65  
- 24 V  
**A33191-PW**



Driver (CV) - PWM - 150 W - IP65  
- 24 V  
**A33291-PW**



Driver (CV) - PWM - 250 W - IP65  
- 24 V  
**A33391-PW**



Driver (CV) - PWM - 320 W - IP65  
- 24 V  
**A33491-PW**



Constant voltage dimmer - 4  
Channel  
**A610291**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**