

**LINE 3 (ITRB13XXXX1020)**



**Product description**

13 W/m - Maximum run per feed 10 m



**Luminaire Structure**

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included

Variant code	Lumen	Efficacy	CCT / CRI
ITRB1330001020	1129 lm/m	88 lm/W	3000K CRI90
ITRB1340001020	1160 lm/m	91 lm/W	4000K CRI90
ITRB1350001020	1192 lm/m	93 lm/W	5000K CRI90

**LINE 3 (ITRB13XXXX1020)**


**Technical information**

<b>Power</b>	12.8 W/m
<b>Driver option</b>	Remote driver (not included)
<b>Driver</b>	Constant voltage (CV)
<b>Input voltage</b>	24V DC
<b>Input current</b>	533mA/m
<b>Operating temperature</b>	-20°C ~ +60°C

<b>MacAdam Ellipse</b>	3 SDCM
<b>Optic</b>	120°
<b>Lifetime L80B10 (hours)</b>	> 50,000
<b>Maximum run per power feed</b>	12 m
<b>LED pitch</b>	8.3 mm
<b>Cutting length</b>	50 mm

<b>Control</b>	Constant voltage dimmer (1 Channel)
<b>Dimensions</b>	Width: 10 mm
<b>Warranty</b>	5 years
<b>Notes</b>	Colour variance +/- 200K. Electrical & optical data variance +/- 10%.

**ITRB13XXXX1020**

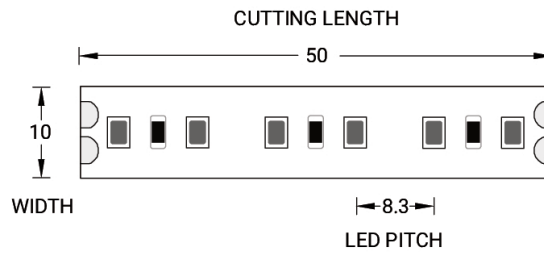

**Accessories**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**