

LINE 9 (ITRB13XXXX1066)



Product description

13 W/m - Maximum run per feed 10 m - IP66



Luminaire Structure

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included

Variant code	Lumen	Efficacy	CCT / CRI
ITRB1330001066	1064 lm/m lm/m	83 lm/W lm/W	3000K CRI90
ITRB1342501066	1165 lm/m lm/m	91 lm/W lm/W	4200K CRI90
ITRB1362501066	1181 lm/m lm/m	92 lm/W lm/W	6250K CRI90

LINE 9 (ITRB13XXXX1066)


Technical information

Power	12.8 W/m
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24V DC
Input current	533 mA/m

Operating temperature	-20°C ~ +60°C
MacAdam Ellipse	3 SDCM
Optic	120°
Lifetime L80B10 (hours)	> 50,000
Maximum run per power feed	10 m

LED pitch	8.3 mm
Cutting length	50 mm
Control	Constant voltage dimmer (1 Channel)
Dimensions	Width 10mm
Warranty	5 years

ITRB13XXXX1066

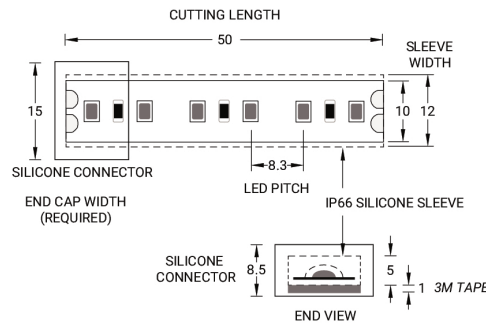

Accessories



Connector silicone - Power feed connector
A80112



Connector silicone - End cap
A80113



Driver (CV) - PWM - 100 W - IP65 - 24 V
A33191-PW



Driver (CV) - PWM - 150 W - IP65 - 24 V
A33291-PW



Driver (CV) - PWM - 250 W - IP65 - 24 V
A33391-PW



Driver (CV) - PWM - 320 W - IP65 - 24 V
A33491-PW



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND

LINE 9 (ITRB13XXXX1066)

Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND
