

LINE 10 (ITRB17XXXX0565)



Product description

17 W/m - Maximum run per feed 5 m - IP65



Luminaire Structure

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included


Variant code	Lumen	Efficacy	CCT / CRI
ITRB1730000565	1597 lm/m	94 lm/W	3000K CRI90
ITRB1732000565	1597 lm/m	94 lm/W	3200K CRI90
ITRB1742000565	1724 lm/m	101 lm/W	4200K CRI90
ITRB1742500565	1724 lm/m	101 lm/W	4250K CRI90
ITRB1757000565	1618 lm/m	95 lm/W	5700K CRI90

LINE 10 (ITRB17XXXX0565)

Technical information

Power	17 W/m	MacAdam Ellipse	3 SDCM	Cutting length	50 mm
Driver option	Remote driver (not included)	Optic	120°	Control	Constant voltage dimmer (1 Channel)
Driver	Constant voltage (CV)	Lifetime L80B10 (hours)	> 50,000	Dimensions	Width: 10 mm
Input voltage	24V DC	Maximum run per power feed	5 m	Warranty	5 years
Operating temperature	-20°C ~ +60°C	LED pitch	8.3 mm	Notes	Colour variance +/- 200K. Electrical & optical data variance +/- 10%.

ITRB17XXXX0565

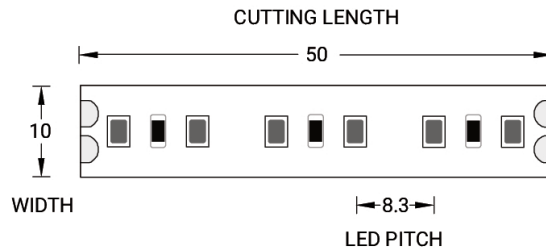

Accessories



Driver (CV) - PWM - 100 W - IP65
- 24 V
A33191-PW



Driver (CV) - PWM - 150 W - IP65
- 24 V
A33291-PW



Driver (CV) - PWM - 250 W - IP65
- 24 V
A33391-PW



Driver (CV) - PWM - 320 W - IP65
- 24 V
A33491-PW



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND