

LINE 5 (ITRB20XXXX0520)



Product description

20 W/m - Maximum run per feed 5 m



Luminaire Structure

- 24V DC
- CRI 90
- 3 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20 and IP65 options
- 5 years warranty
- 3M adhesive backing. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included


Variant code	Lumen	Efficacy	CCT / CRI
ITRB2030000520	1680 lm/m	84 lm/W	3000K CRI90
ITRB2040000520	1879 lm/m	93 lm/W	4000K CRI90
ITRB2060000520	1900 lm/m	95 lm/W	6000K CRI90

LINE 5 (ITRB20XXXX0520)

Technical information

Power	20 W/m	MacAdam Ellipse	3 SDCM	Control	Constant voltage dimmer (1 Channel)
Driver option	Remote driver (not included)	Optic	120°	Dimensions	Width: 10 mm
Driver	Constant voltage (CV)	Lifetime L80B10 (hours)	> 50,000	Warranty	5 years
Input voltage	24V DC	Maximum run per power feed	5 m	Notes	Colour variance +/- 200K. Electrical & optical data variance +/- 10%.
Input current	833mA/m	LED pitch	8.3 mm		
Operating temperature	-20°C ~ +60°C	Cutting length	50 mm		

ITRB20XXXX0520

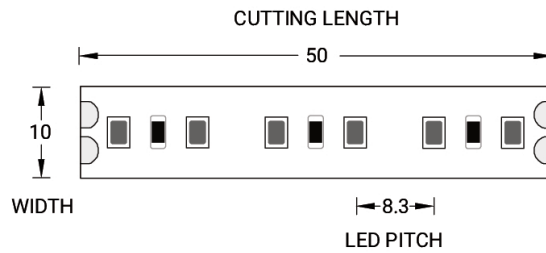

Accessories



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND