

PROLINE 4 (ITRB30XXXX1020)



Product description

30 W/m - Maximum run per feed 10 m



PROSERIES

Luminaire Structure

- 24V DC
- CRI 95
- 2 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20
- 7 years warranty
- 3M VHB tape. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver is not included


Variant code	Lumen	Efficacy	CCT / CRI
ITRB3027001020	3250 lm/m	108 lm/W	2700K CRI95
ITRB3030001020	3300 lm/m	110 lm/W	3000K CRI95
ITRB3040001020	3350 lm/m	112 lm/W	4000K CRI95

PROLINE 4 (ITRB30XXXX1020)

Technical information

Power	30 W/m	MacAdam Ellipse	2 SDCM	Control	Constant voltage dimmer (1 Channel)
Driver option	Remote driver (not included)	Optic	115°	Dimensions	Width: 12 mm x Height: 1.6 mm
Driver	Constant voltage (CV)	Lifetime L80B10 (hours)	> 50,000	Warranty	7 years
Input voltage	24V DC	Maximum run per power feed	10 m	Notes	Colour variance +/- 60K. Electrical & optical data variance +/- 10%.
Input current	1250mA/m	LED pitch	7.1 mm		
Operating temperature	-25°C ~ +60°C	Cutting length	50 mm		

ITRB30XXXX1020

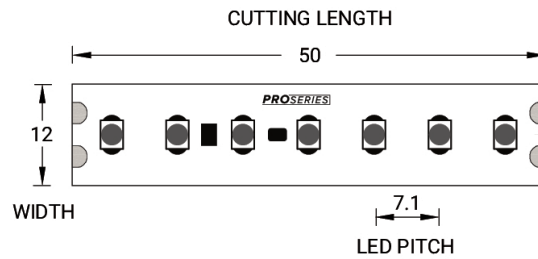

Accessories



Constant voltage dimmer - 4 Channel
A610291



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND