


JANET 3 (JA-60821) (Version 1)**Product description**

Without remote driver - With recessing box - Constant voltage (CV) 24 V

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

Optic**Product colour**


00 - Stainless Steel

JANET 3 (JA-60821) (Version 1)

Technical information

| | | | | | |
|----------------------|------------------------------|--------------------------|--------------------------|---------------------------------|---|
| Material | Stainless Steel | Optic value | 23°, 31°, 51° | Operating temperature | -20 °C to 40 °C |
| Light source | 3 LED | CCT / CRI | 3000K CRI80, 4000K CRI80 | Cable | One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable |
| Power | 7 W | Bug | B1-U0-G0, B2-U0-G0 | Through wiring | Single cable entry |
| Lumen | 617 - 765 lm | ULR | 0% | Lens / Reflector / Optic | Clear toughened glass |
| Efficacy | 88 - 109 lm/W | ULOR | 0% | MacAdam Ellipse | 3 SDCM |
| Driver option | Remote driver (not included) | CIE flux code n°3 | 100 | Lifetime L90B10 (hours) | > 120,000 |
| Driver | Constant voltage (CV) | Dimming type | On/Off | Lifetime L80B10 (hours) | > 120,000 |
| Input voltage | 24 VDC | Product colours | Stainless Steel | Lifetime L80B50 (hours) | > 120,000 |
| Optic | N, M, W | Weight | 1.6 kg | | |

JA-60821

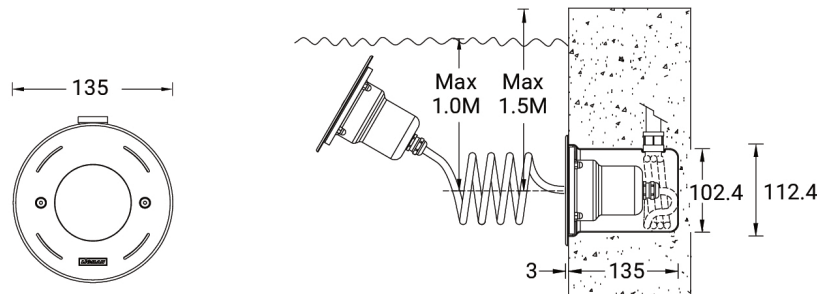

Accessories



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W - IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W - IP67 - 24 V
A35091-ND