

## JANET 3 (JA-60821) (Version 1)



### Product description


Without remote driver - With recessing box - Constant voltage (CV) 24 V



### Luminaire Structure

- |  |   |   |
|--|---|---|
| <ul style="list-style-type: none"> <li>- Stainless steel body in grade 316</li> <li>- Single cable entry</li> <li>- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable</li> <li>- Stainless steel fasteners in grade 316</li> <li>- Durable silicone rubber gasket</li> </ul> | <ul style="list-style-type: none"> <li>- Clear toughened glass</li> <li>- Remote driver (not included)</li> <li>- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products</li> <li>- Recessing box in stainless steel 316 grade</li> <li>- Luminaire must be submerged when operational</li> </ul> | <ul style="list-style-type: none"> <li>- Maximum depth 2 m</li> <li>- Outdoor cable needs to be ordered with a specific length</li> </ul> |
|--|---|---|

### Optic

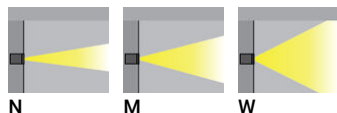

### Product colour




## JANET 3 (JA-60821) (Version 1)

### Technical information

|                      |                              |                          |                          |                                 |   |
|----------------------|------------------------------|--------------------------|--------------------------|---------------------------------|---|
| <b>Material</b>      | Stainless Steel              | <b>Optic value</b>       | 23°, 31°, 51°            | <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Light source</b>  | 3 LED                        | <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80 | <b>Cable</b>                    | One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable |
| <b>Power</b>         | 7 W                          | <b>Bug</b>               | B1-U0-G0, B2-U0-G0       | <b>Through wiring</b>           | Single cable entry  |
| <b>Lumen</b>         | 617 - 765 lm                 | <b>ULR</b>               | 0%                       | <b>Lens / Reflector / Optic</b> | Clear toughened glass   |
| <b>Efficacy</b>      | 88 - 109 lm/W                | <b>ULOR</b>              | 0%                       | <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Driver option</b> | Remote driver (not included) | <b>CIE flux code n°3</b> | 100                      | <b>Lifetime L90B10 (hours)</b>  | > 120,000   |
| <b>Driver</b>        | Constant voltage (CV)        | <b>Dimming type</b>      | On/Off                   | <b>Lifetime L80B10 (hours)</b>  | > 120,000   |
| <b>Input voltage</b> | 24 VDC                       | <b>Product colours</b>   | Stainless Steel          | <b>Lifetime L80B50 (hours)</b>  | > 120,000   |
| <b>Optic</b>         | N, M, W                      | <b>Weight</b>            | 1.6 kg                   |                                 |   |

### JA-60821

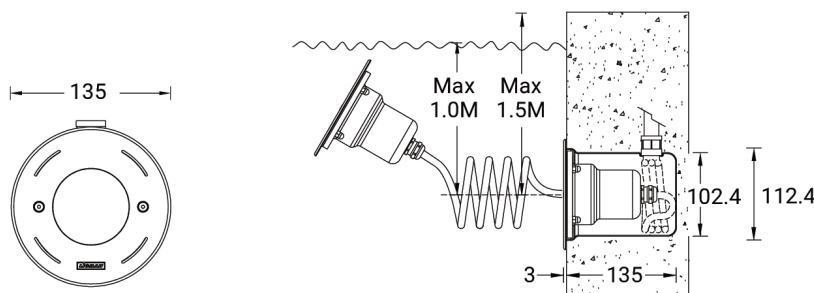

### Accessories



Driver (CV) - On/Off - 36 W - IP67  
- 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**