


**JANET 3** (JA-60822) (Version 1)**Product description**

Without remote driver - With recessing box - Constant voltage (CV) 24 V

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

**Optic****Product colour**


00 - Stainless Steel

**JANET 3** (JA-60822) (Version 1)

**Technical information**

<b>Material</b>	Stainless Steel	<b>Optic value</b>	22°, 30°, 48°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	5 LED	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Power</b>	11 W	<b>Bug</b>	B1-U0-G0, B2-U0-G0	<b>Through wiring</b>	Single cable entry
<b>Lumen</b>	1057 - 1290 lm	<b>ULR</b>	0%	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Efficacy</b>	96 - 117 lm/W	<b>ULOR</b>	0%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Driver option</b>	Remote driver (not included)	<b>CIE flux code n°3</b>	100	<b>Lifetime L90B10 (hours)</b>	> 120,000
<b>Driver</b>	Constant voltage (CV)	<b>Dimming type</b>	On/Off	<b>Lifetime L80B10 (hours)</b>	> 120,000
<b>Input voltage</b>	24 VDC	<b>Product colours</b>	Stainless Steel	<b>Lifetime L80B50 (hours)</b>	> 120,000
<b>Optic</b>	N, M, W	<b>Weight</b>	1.6 kg		

**JA-60822**

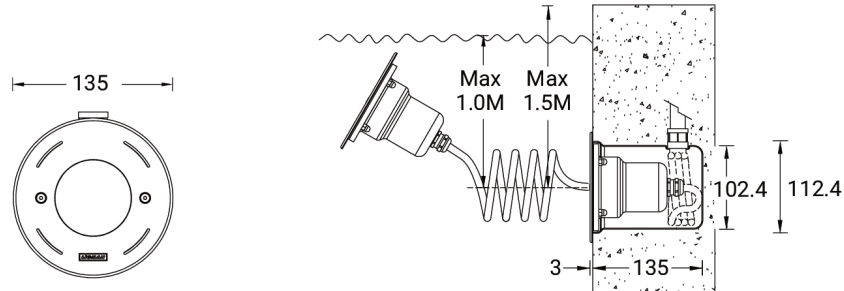

**Accessories**



Driver (CV) - On/Off - 36 W - IP67 - 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W - IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W - IP67 - 24 V  
**A35091-ND**