


JET 48 (JE-10565)



Product description

102x102 mm - 1200 mm - 2 sides - Square

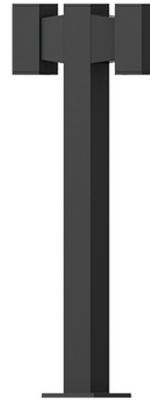


Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry


- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector

- Clear toughened glass
- Integral control gear


Optic

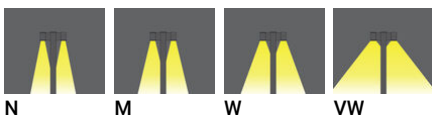

Product colour

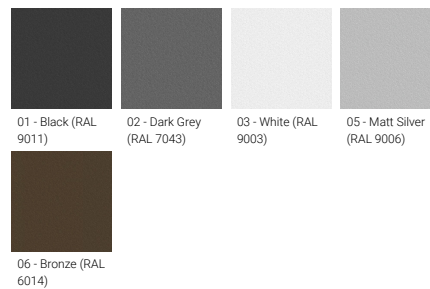

Special finishes upon request

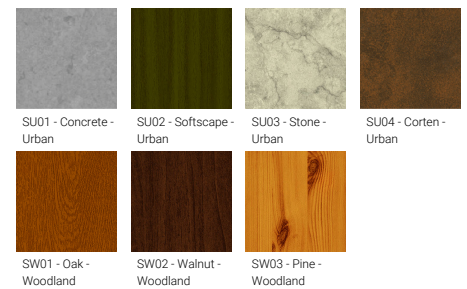

JET 48 (JE-10565)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 2 x 1 COB |
| Power | 27 W |
| Lumen | 2744 - 3270 lm |
| Efficacy | 91 - 109 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | N, M, W, VW |


| | |
|--------------------------|--|
| Optic value | 18°, 21°, 31°, 70°x44° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B1-U2-G0, B2-U2-G0 |
| ULR | 2%, 3%, <1% |
| ULOR | 2%, 3% |
| CIE flux code n°3 | 99 |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 10.1 kg |

| | |
|--|---|
| Operating temperature | -20 °C to 50 °C |
| Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | High-efficiency optical reflector, Clear toughened glass |
| MacAdam Ellipse Lifetime L90B10 (hours) | 3 SDCM > 55,000 |
| Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

JE-10565

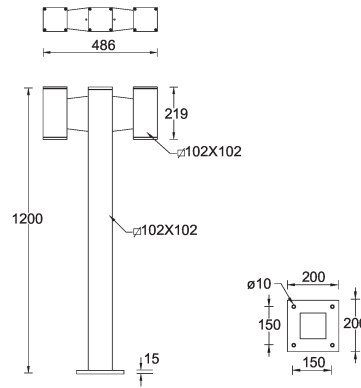

JET 48 (JE-10565)**Accessory**



Anchor bolt
A10691



DALI Control System
Control-DALI



Root mount kit
A15891