

JET 49 (JE-20001) (Version 2)



Product description


1 side - Supplied with a square, straight aluminium pole - Height options: 3 - 6 m




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Extruded aluminium column
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 140 km/h


Optic



Product colour

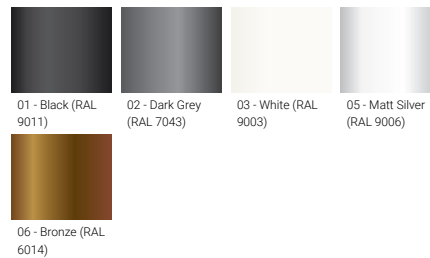

Special finishes upon request

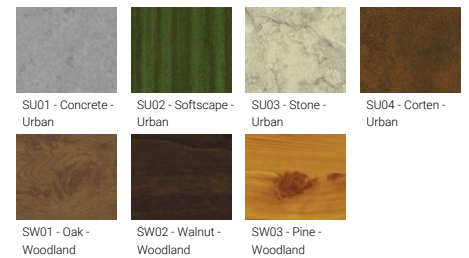

JET 49 (JE-20001) (Version 2)


Technical information

Material	Aluminium
Light source	1 COB
Power	35 W
Lumen	3475 - 4094 lm
Efficacy	99 - 117 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW




Optic value	16°, 26°, 42°, 59°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G0, B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	19.3 kg

Operating temperature	-20 °C to 50 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,700
Lifetime L80B10 (hours)	> 63,500
Lifetime L80B50 (hours)	> 63,500
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

JE-20001

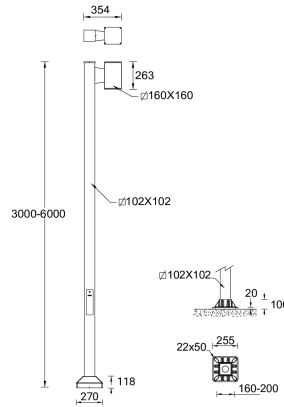

Accessories



JET 49 (JE-20001) (Version 2)

4 m - Square, straight aluminium
pole for JET - 1 side
APC140102-JET



5 m - Square, straight aluminium
pole for JET - 1 side
APC150102-JET



6 m - Square, straight aluminium
pole for JET - 1 side
APC160102-JET
