

JET 39 (JE-80031)



Product description

Ø102 - 232 mm - Round



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic



Product colour

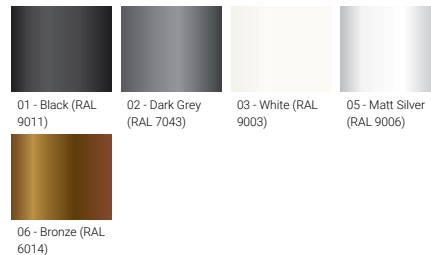

Special finishes upon request


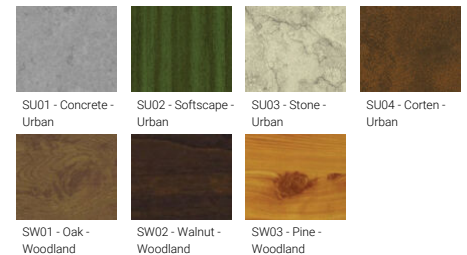


JET 39 (JE-80031)

Technical information

Material	Aluminium	Optic	N, M, W, VW	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	18°, 24°, 41°, 72°	Weight	1.6 kg
Power	14 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 50 °C
Lumen	1370 - 1618 lm	Bug	B1-U0-G0, B2-U0-G0	Through wiring	Single cable entry
Efficacy	98 - 116 lm/W	ULR	0%	Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
Driver option	Integral control gear	ULOR	0%	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	CIE flux code n°3	100	Lifetime L90B10 (hours)	> 55,000
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

JET 39
JE-80031

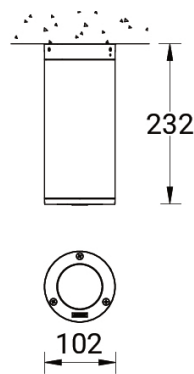

Accessories



Surface mounting box for easy cabling (JET 39)
SCE-JET-39



DALI Control System
Control-DALI