

JET 39 (JE-80074)



Product description

Ø102 - 140 mm - Round




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



Product colour

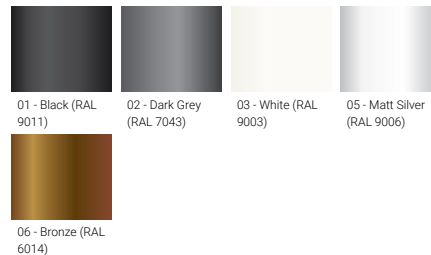

Special finishes upon request



JET 39 (JE-80074)



Technical information

Material	Aluminium
Light source	MR16-GU10
Power	7.5 W
Lumen	254 - 395 lm
Efficacy	34 - 53 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	N, M, VW, E
Optic value	60°, 13°, 23°, 60°, 12°x51°
CCT / CRI	3000K CRI95, 4000K CRI95
Bug	B0-U0-G0, B1-U0-G0, B1-U1-G0
ULR	0%
ULOR	0%

CIE flux code n°3	100, 99
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.7 kg
Operating temperature	-20 °C to 50 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass

JET 39
JE-80074



Accessories



Surface mounting box for easy cabling (JET 39)
SCE-JET-39