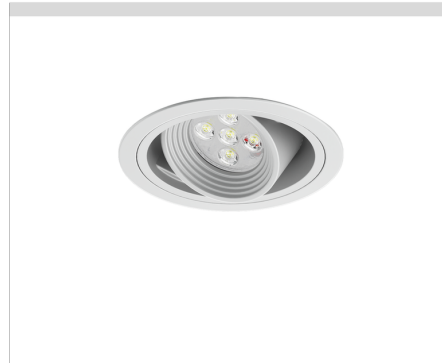


**JASPER 2 (JS-80011)****Product description**


Ø115 mm

**Luminaire Structure**

- Die-cast aluminium housing with powder coating
- Die-cast aluminium heat sink with excellent thermal management

- Propriety lens design for high LOR
- Adjustable: Tilt 30°

- Remote driver is included


**Optic****Product colour**

## JASPER 2 (JS-80011)

## Technical information

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Glossy White, Glossy Black
<b>Light source</b>	5 LED	<b>Input voltage</b>	500 mA, 15 VDC	<b>Weight</b>	0.43 kg.
<b>Power</b>	9 W	<b>Optic</b>	N, M, W	<b>Operating temperature</b>	-20 °C to 50 °C
<b>Lumen</b>	612 - 750 lm	<b>Optic value</b>	19°, 31°, 48°	<b>Variants (1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Efficacy</b>	68 - 83 lm/W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80		
<b>Driver option</b>	Remote driver (included)	<b>Dimming type</b>	On/Off, 1-10V, DALI, Trailing edge		

JS-80011



## Accessories



DALI Control System  
Control-DALI