

KIOS 2 (KI-60506)**Product description**

With recessing box / driver - Embross frame -
Adjustable: Tilt +/- 33°

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 5.5 mm thick front ring in grade 316 stainless steel
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 2000 kg
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 50 km/h
- Load is transferred by the housing to the foundation
- The distance between the floodlight and the illuminated surface should be at least 0.5 m

Optic

VN



Product colour00 - Stainless
Steel

KIOS 2 (KI-60506)

Technical information

Material	Stainless Steel	Optic	VN	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Light source	2 x 1 LED	Optic value	8°	MacAdam Ellipse	3 SDCM
Power	7 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 109,000
Lumen	510 - 600 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 109,000
Efficacy	73 - 86 lm/W	Product colours	Stainless Steel	Lifetime L80B50 (hours)	> 109,000
Driver option	Integral control gear	Weight	5.3 kg	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	Operating temperature	-20 °C to 40 °C		
Input voltage	220-240 V 50/60 Hz	Through wiring	Single cable entry, through wiring upon request		

KI-60506

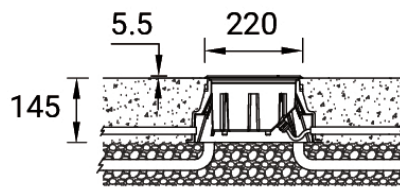


Accessories



Anti slip glass
A61512



Connector IP68 3 Pin Power
A62591



Honeycomb louvre
A62021



DALI Control System
Control-DALI

KIOS 2 (KI-60506)

Connector IP68 5 Pin Power +
Signal

A613191

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.