

KWH 12 (KWH-50053)



Product description

Large - 2 heads - RGBTW




Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single or double head configuration for all three sizes


- Each of the heads can be aimed, adjusted and locked for precise aiming
- Single cable entry, through wiring upon request
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket

- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Hot-dipped galvanised steel mounting bracket allows for ceiling, wall or surface mounting


Optic

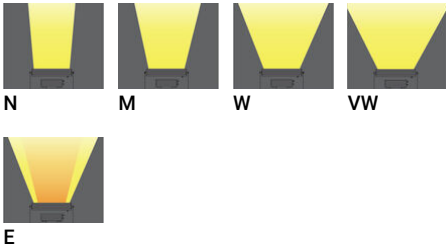

Product colour

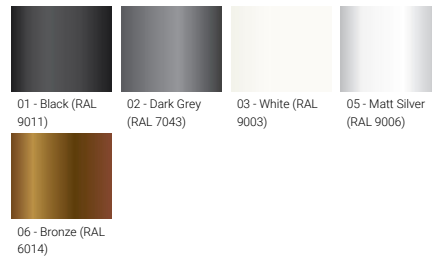

Special finishes upon request

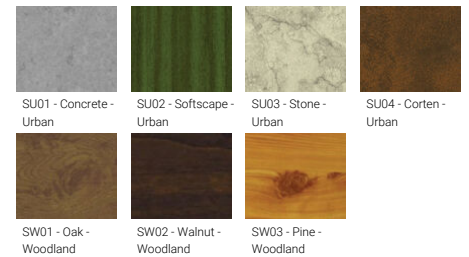


KWH 12 (KWH-50053)

Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 2 x 80 LED |
| Power | 184 W |
| Lumen | 11680 - 14210 lm |
| Efficacy | 63 - 77 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |

| | |
|--------------------------|--------------------------------|
| Optic | N, M, W, VW, E |
| Optic value | 9°, 15°, 31°, 63°x65°, 10°x44° |
| CCT / CRI | RGBTW |
| Bug | B3-U0-G0, B4-U0-G0 |
| ULR | 0% |
| ULOR | 0% |
| CIE flux code n°3 | 100 |
| Dimming type | DMX, DMX/RDM |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 18 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable |
| Through wiring | Single cable entry, through wiring upon request |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |

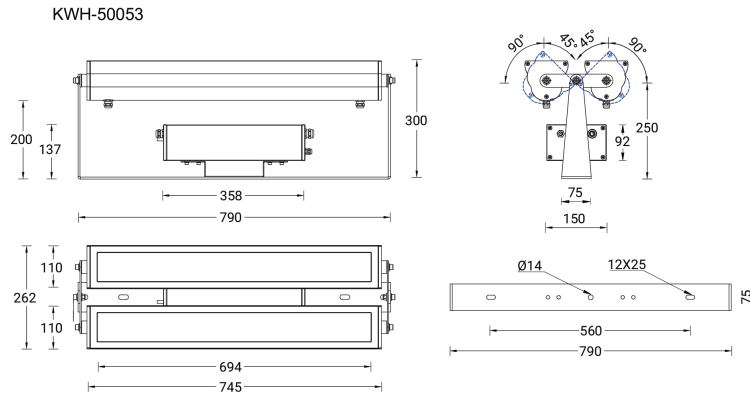

Accessories



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM