

LIGHTALK 7 (LA-30014)













Product description

Integral control gear - 1205 mm - Class I - RGBW




Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal $\,$

Optic









06 - Bronze (RAL 6014)





SU01 - Concrete Urban







Jrban Urba

Jrban Urb

Special finishes upon request

Urban

SU04 - Corten -Urban

Wood

SW01 - Oak -Woodland

SW02 - Walnut -Woodland

t - SW03 - Pine - Woodland

We reserve the right to make technical and design changes.



LIGHTALK 7 (LA-30014)


Technical information

Material	Aluminium
Light source	2 x 20 LED
Power	66 W
Lumen	3477 - 4043 lm
Efficacy	53 - 61 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	VN, N, M, W, E
Optic value	10°, 13°, 25°, 43°, 18° x 35°
CCT / CRI	RGBW30, RGBW40
Bug	B0-U5-G0
ULR	100%
ULOR	100%
Dimming type	DMX, DMX/RDM
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine -

Weight	5.3 kg
Operating temperature	-20 °C to 40 °C
Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass
Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LA-30014

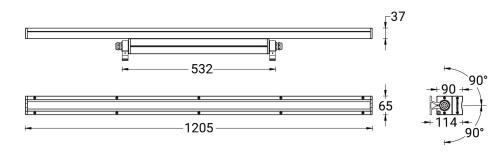



Accessories



75 mm extend arm mounting **A30891**



150 mm extend arm mounting **A30991**



300 mm extend arm mounting **A31091**



450 mm extend arm mounting **A31191**



LIGHTALK 7 (LA-30014)



Pharos - CLOUD **A64991**



DMX Control System
Control-DMX



DMX/RDM Control System Control-DMX-RDM