

LIGHTALK 8 (LA-30021)



Product description

Without remote box IP-rated - With remote driver - Constant current (CC) 500 mA - 610 mm - Class I



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request

- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal

Optic



VN

N

M

W



E

Product colour



01 - Black (RAL 9011)

02 - Dark Grey (RAL 7043)


03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

LIGHTALK 8 (LA-30021)


Technical information

Material	Aluminium
Light source	18 LED
Power	28 W
Lumen	1943 - 3215 lm
Efficacy	69 - 115 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	500 mA, 54 VDC

Optic	VN, N, M, W, E
Optic value	12°, 14°, 24°, 44°, 18° x 35°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.1 kg
Operating temperature	-20 °C to 40 °C
Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable

Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LA-30021

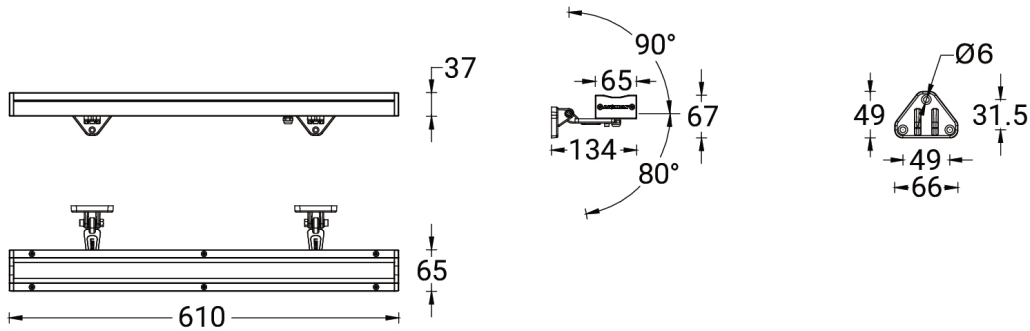

Accessories



75 mm extend arm mounting
A30891



150 mm extend arm mounting
A30991



300 mm extend arm mounting
A31091



450 mm extend arm mounting
A31191

LIGHTALK 8 (LA-30021)



DALI Control System
Control-DALI