

LIGHTALK 15 (LA-30032) (Version 1)



Product description


Without remote driver - Constant voltage (CV) 24 V -
410 mm - Class III - RGBW



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal

Optic




N

M

W

E

Product colour

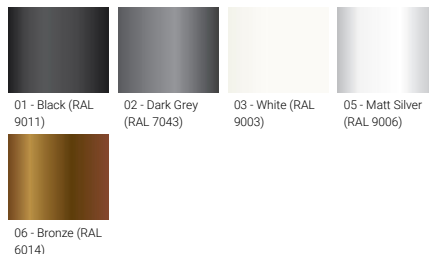

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

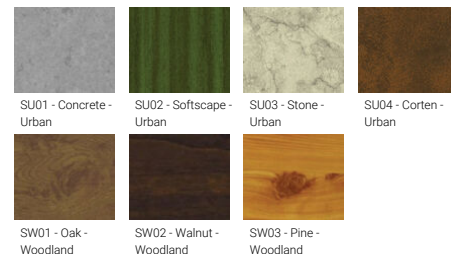

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland


SW03 - Pine - Woodland

LIGHTALK 15 (LA-30032) (Version 1)


Technical information

Material	Aluminium	Driver	Constant voltage (CV)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	12 LED	Input voltage	24 VDC	Weight	2.2 kg
Power	24 W	Optic	N, M, W, E	Operating temperature	-20 °C to 40 °C
Lumen	510 - 1383 lm	Optic value	16°, 32°, 55°, 20°x30°	Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Efficacy	21 - 58 lm/W	CCT / CRI	RGB+Amber, RGBW30, RGBW40	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	Dimming type	DMX, DMX/RDM	Lens / Reflector / Optic	Clear toughened glass

LA-30032

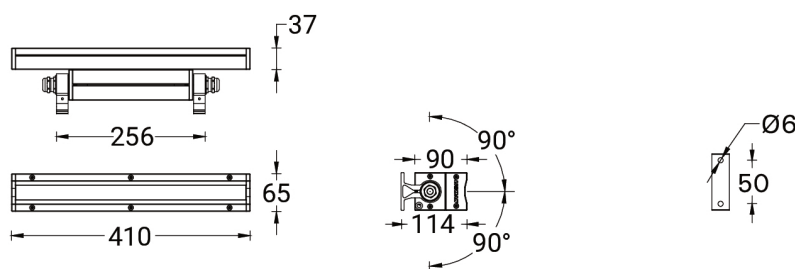

Accessories







Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND

LIGHTALK 15 (LA-30032) (Version 1)

			
<p>Driver (CV) - On/Off - 150 W - IP67 - 24 V A34891-ND</p>	<p>Driver (CV) - On/Off - 36 W - IP67 - 24 V A34491-ND</p>	<p>Driver (CV) - On/Off - 200 W - IP67 - 24 V A34991-ND</p>	<p>Driver (CV) - On/Off - 350 W - IP67 - 24 V A35091-ND</p>