

LIGHTALK 10 (LA-40014)



Product description


Without recessing box - Integral control gear - 1250 mm - Class I - RGBW



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic

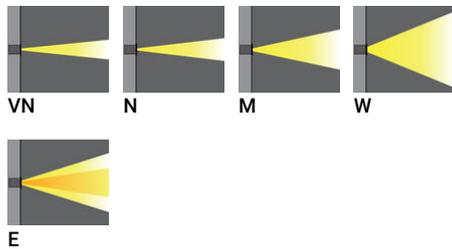

Product colour



Special finishes upon request

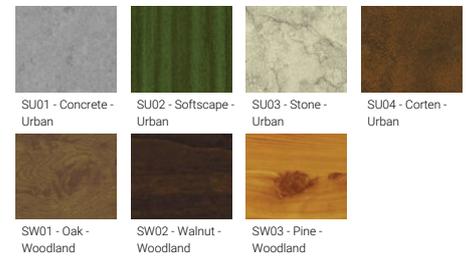


LIGHTALK 10 (LA-40014)

Technical information

Material	Aluminium	Optic	VN, N, M, W, E	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	2 x 20 LED	Optic value	10°, 13°, 25°, 43°, 18° x35°	Weight	6.2 kg
Power	66 W	CCT / CRI	RGBW30, RGBW40	Operating temperature	-20 °C to 40 °C
Lumen	3302 - 3839 lm	Bug	B3-U1-G0	Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Efficacy	50 - 58 lm/W	ULR	0%	Through wiring	Two cable entries for through wiring
Driver option	Integral control gear	ULOR	0%	Lens / Reflector / Optic	Clear toughened glass
Driver	Constant current (CC)	CIE flux code n°3	100	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Dimming type	DMX, DMX/RDM		

LA-40014

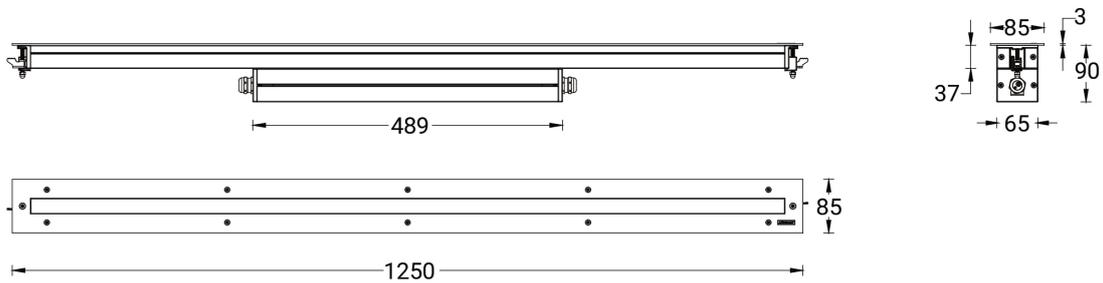

Accessories

