


## LIGHTALK 2 (LA-60014)



### Product description


With recessing box - Integral control gear - 1250 mm - Class I - RGBW



### Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

### Optic



### Product colour




00 - Stainless Steel

## LIGHTALK 2 (LA-60014)

### Technical information

<b>Material</b>	Stainless Steel	<b>Optic</b>	VN, N, M, W, E	<b>Weight</b>	7.4 kg
<b>Light source</b>	2 x 20 LED	<b>Optic value</b>	10°, 13°, 25°, 43°, 18° x35°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Power</b>	66 W	<b>CCT / CRI</b>	RGBW30, RGBW40	<b>Cable</b>	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Lumen</b>	3302 - 3839 lm	<b>Bug</b>	B0-U5-G0	<b>Through wiring</b>	Two cable entries for through wiring
<b>Efficacy</b>	50 - 58 lm/W	<b>ULR</b>	100%	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Driver option</b>	Integral control gear	<b>ULOR</b>	100%	<b>Variants (DMX/RDM)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	DMX, DMX/RDM		
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Product colours</b>	Stainless Steel		

## LA-60014

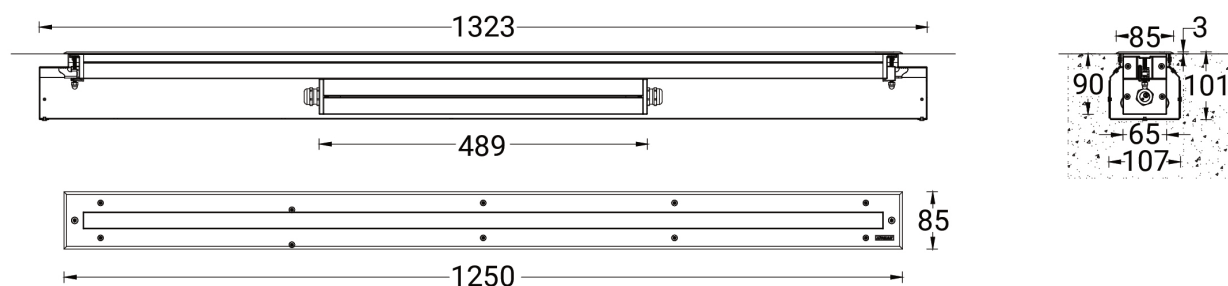

### Accessories



DMX Control System  
Control-DMX



DMX/RDM Control System  
Control-DMX-RDM