

LIGHTTALK 11 (LA-60022) (Version 1)



Product description


Without remote driver - With recessing box - Constant voltage (CV) 24 V - 655 mm - Class III



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic

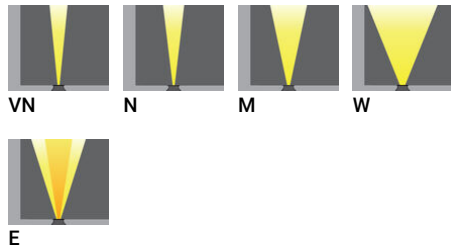

Product colour




LIGHTALK 11 (LA-60022) (Version 1)

Technical information

Material	Stainless Steel	Optic	VN, N, M, W, E	Product colours	Stainless Steel
Light source	18 LED	Optic value	13°, 15°, 26°, 44°, 20° x 36°	Weight	4.2 kg
Power	25 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Lumen	2202 - 2760 lm	Bug	B2-U1-G0, B3-U1-G0	Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Efficacy	88 - 110 lm/W	ULR	0%	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	ULOR	0%	Lens / Reflector / Optic	Clear toughened glass
Driver	Constant voltage (CV)	CIE flux code n°3	100		
Input voltage	24 VDC	Dimming type	On/Off		


LA-60022

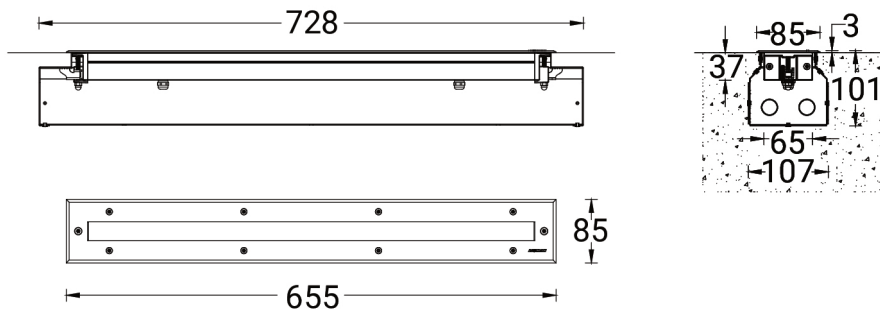

Accessories




Cable - Connector IP67 Female 2 Pin Power - 1000 mm
A65491-001



Cable - Connector IP67 Female 2 Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm
A65591-001



Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin Power
A68191



Connector IP67 Male 2 Pin Power
A68291



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND

LIGHTALK 11 (LA-60022) (Version 1)

Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND
