

LIGHTTALK 11 (LA-60022) (Version 1)



Product description

Without remote driver - With recessing box - Constant voltage (CV) 24 V - 655 mm - Class III



Luminaire Structure

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> - Die-cast aluminium end-caps - Extruded aluminium housing - Pre-treated before powder coating ensuring high corrosion resistance - Stainless steel frame on request - Two cable entries for through wiring | <ul style="list-style-type: none"> - Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable - Stainless steel fasteners in grade 304 with zinc flake coating (ZFC) - Durable silicone rubber gasket - Clear toughened glass - Remote driver (not included) | <ul style="list-style-type: none"> - Recessing box is included - Suitable for walk-over with a maximum load of 500 kg - 24 VDC input, DMX/RDM address with stable signal |
|---|--|---|

Optic



Product colour



00 - Stainless Steel

LIGHTALK 11 (LA-60022) (Version 1)


Technical information

Material	Stainless Steel
Light source	18 LED
Power	25 W
Lumen	2202 - 2760 lm
Efficacy	88 - 110 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC

Optic	VN, N, M, W, E
Optic value	13°, 15°, 26°, 44°, 20° x 36°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U1-G0, B3-U1-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off

Product colours	Stainless Steel
Weight	4.2 kg
Operating temperature	-20 °C to 40 °C
Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass


LA-60022

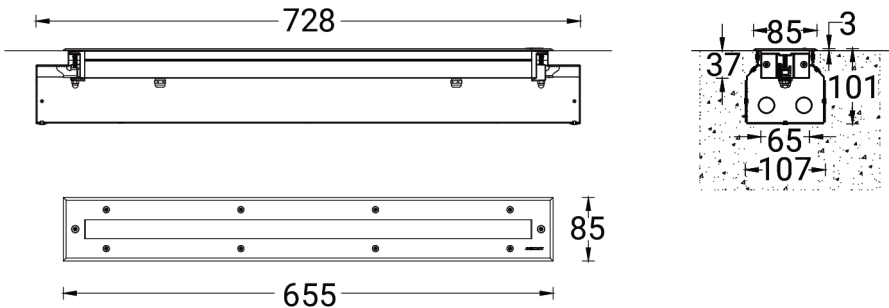

Accessories




Cable - Connector IP67 Female 2 Pin Power - 1000 mm
A65491-001



Cable - Connector IP67 Female 2 Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm
A65591-001



Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin Power
A68191



Connector IP67 Male 2 Pin Power
A68291



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND

LIGHTALK 11 (LA-60022) (Version 1)



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND