

# LIGHTALK 11 (LA-60024) (Version 1)



## Product description

Without remote driver - With recessing box - Constant voltage (CV) 24 V - 455 mm - Class III



## Luminaire Structure

- |   |  |   |
|---|--|---|
| <ul style="list-style-type: none"> <li>- Die-cast aluminium end-caps</li> <li>- Extruded aluminium housing</li> <li>- Pre-treated before powder coating ensuring high corrosion resistance</li> <li>- Stainless steel frame on request</li> <li>- Two cable entries for through wiring</li> </ul> | <ul style="list-style-type: none"> <li>- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable</li> <li>- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)</li> <li>- Durable silicone rubber gasket</li> <li>- Clear toughened glass</li> <li>- Remote driver (not included)</li> </ul> | <ul style="list-style-type: none"> <li>- Recessing box is included</li> <li>- Suitable for walk-over with a maximum load of 500 kg</li> <li>- 24 VDC input, DMX/RDM address with stable signal</li> </ul> |
|---|--|---|

## Optic



AS

## Product colour



00 - Stainless Steel

# LIGHTALK 11 (LA-60024) (Version 1)


## Technical information

Material	Stainless Steel
Light source	12 LED
Power	16 W
Lumen	1458 - 1535 lm
Efficacy	91 - 96 lm/W
Driver option	Remote driver (not included)

Driver	Constant voltage (CV)
Input voltage	24 VDC
Optic	AS
Optic value	27°x60°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off

Product colours	Stainless Steel
Weight	2.4 kg
Operating temperature	-20 °C to 40 °C
Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass


## LA-60024

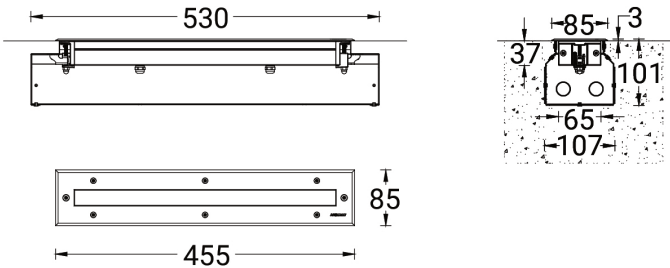

## Accessories




Cable - Connector IP67 Female 2 Pin Power - 1000 mm  
A65491-001



Cable - Connector IP67 Female 2 Pin Power - 5000 mm  
A65491-005



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm  
A65591-001



Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm  
A65591-005



Connector IP67 Female 2 Pin Power  
A68191



Connector IP67 Male 2 Pin Power  
A68291



Driver (CV) - On/Off - 36 W - IP67 - 24 V  
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
A34591-ND

**LIGHTALK 11** (LA-60024) (Version 1)



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**