

**LIGHTALK 12 (LA-60031) (Version 1)**



**Product description**


Without remote driver - With recessing box - Constant voltage (CV) 24 V - 455 mm - Class III - RGBW



**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

**Optic**

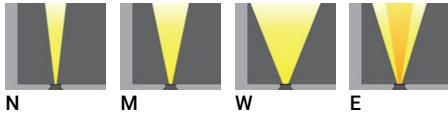

**Product colour**




**LIGHTALK 12** (LA-60031) (Version 1)

**Technical information**

<b>Material</b>	Stainless Steel	<b>Driver</b>	Constant voltage (CV)	<b>Product colours</b>	Stainless Steel
<b>Light source</b>	12 LED	<b>Input voltage</b>	24 VDC	<b>Weight</b>	3.2 kg
<b>Power</b>	24 W	<b>Optic</b>	N, M, W, E	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	510 - 1383 lm	<b>Optic value</b>	16°, 32°, 55°, 20°x30°	<b>Cable</b>	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Efficacy</b>	21 - 58 lm/W	<b>CCT / CRI</b>	RGB+Amber, RGBW30, RGBW40	<b>Through wiring</b>	Two cable entries for through wiring
<b>Driver option</b>	Remote driver (not included)	<b>Dimming type</b>	DMX, DMX/RDM	<b>Lens / Reflector / Optic</b>	Clear toughened glass

**LA-60031**

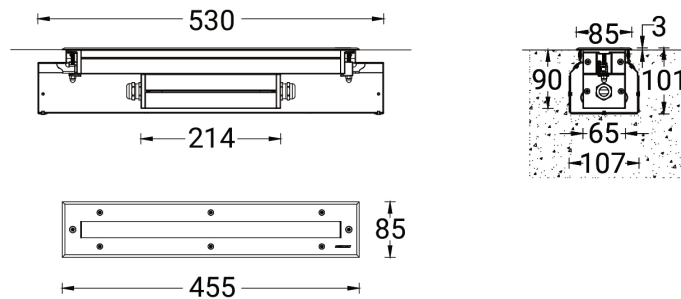

**Accessories**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**

**LIGHTTALK 12** (LA-60031) (Version 1)

---

Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**

---