

LIGHTTALK 12 (LA-60033) (Version 1)



Product description


Without remote driver - With recessing box - Constant voltage (CV) 24 V - 1250 mm - Class III - RGBW



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic



Product colour




LIGHTALK 12 (LA-60033) (Version 1)

Technical information

Material	Stainless Steel	Driver	Constant voltage (CV)	Product colours	Stainless Steel
Light source	36 LED	Input voltage	24 VDC	Weight	7.8 kg
Power	70 W	Optic	N, M, W, E	Operating temperature	-20 °C to 40 °C
Lumen	1810 - 3896 lm	Optic value	16°, 32°, 55°, 20°x30°	Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Efficacy	33 - 71 lm/W	CCT / CRI	RGB+Amber, RGBW30, RGBW40	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	Dimming type	DMX, DMX/RDM	Lens / Reflector / Optic	Clear toughened glass

LA-60033

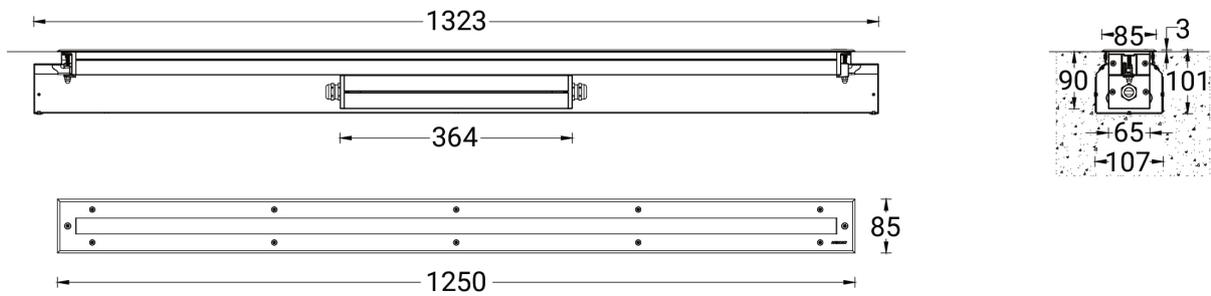

Accessories



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND

LIGHTALK 12 (LA-60033) (Version 1)

Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND
